


4 PIN DIP PHOTOTRANSISTOR PHOTOCOUPLED EL2514-G Series

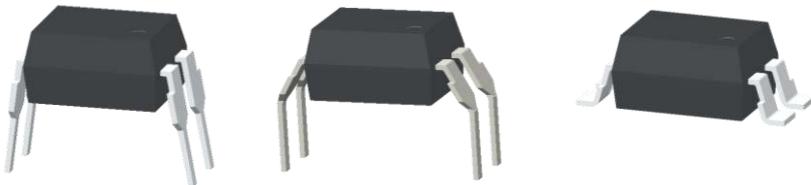

Features:

- Halogens free.
(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- Current transfer ratio(CTR: 50~200% at $I_F = 5\text{mA}$, $V_{CE} = 5\text{V}$, $T_A = 25^\circ\text{C}$)
- High isolation voltage between input and output ($V_{ISO} = 5000\text{Vrms}$)
- High-Speed switching ($t_{on} \leq 25\ \mu\text{s}$ at $I_F=5\text{mA}$, $V_{CC}=5\text{V}$, $R_L=5\text{k}\Omega$, $T_A = 25^\circ\text{C}$)
($t_{off} \leq 25\ \mu\text{s}$ at $I_F=5\text{mA}$, $V_{CC}=5\text{V}$, $R_L=5\text{k}\Omega$, $T_A = 25^\circ\text{C}$)
- Creepage distance > 7.62mm
- Operating temperature up to $+110^\circ\text{C}$
- Compact small outline package
- Compliance with EU REACH
- The product itself will remain within RoHS compliant version
- UL and cUL (No.E214129)
- VDE approved (No.132249)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved
- CQC approved

Description


The EL2514-G series of devices each consist of an infrared emitting diodes, optically coupled to a phototransistor detector. The EL2514-G has enabled relatively high switching speed with high load resistor of several $\text{k}\Omega$.

They are packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

Applications

- Programmable controllers
- System appliances, measuring instruments
- Electronic electricity meter
- Telecommunication equipments
- Power supply

Schematic



Pin Configuration

1. Anode
2. Cathode
3. Emitter
4. Collector

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I _F	50	mA
	Peak Forward Current (1μs, pulse)	I _{FP}	0.5	A
	Reverse Voltage	V _R	6	V
Output	Collector Current	I _C	20	mA
	Collector-Emitter Voltage	V _{CEO}	40	V
	Emitter-Collector Voltage	V _{ECO}	0.45	V
Total Power Dissipation		P _{TOT}	200	mW
Isolation Voltage* ¹		V _{ISO}	5000	V _{rms}
Operating Temperature		T _{OPR}	-55 to +110	°C
Storage Temperature		T _{STG}	-55 to +125	°C
Soldering Temperature* ²		T _{SOL}	260	°C

Notes:

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

*2 For 10 seconds

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Current	I _F	5	6	7	mA

Electro-Optical Characteristics (Ta=25°C unless specified otherwise)**Input**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward Voltage	V _F	-	1.2	1.4	V	I _F = 20mA
Reverse Current	I _R	-	-	10	µA	V _R = 4V
Input Capacitance	C _{in}	-	30	250	pF	V = 0, f = 1kHz

Output







Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Collector-Emitter Dark Current	I _{CEO}	-	-	100	nA	V _{CE} = 10V, I _F = 0mA
Collector-Emitter Breakdown Voltage	BV _{CEO}	40	-	-	V	I _C = 0.1mA
Emitter-Collector Breakdown Voltage	BV _{ECO}	0.45	-	-	V	I _E = 0.1mA

Transfer Characteristics

Parameter	Symbol	Min	Typ.	Max.	Unit	Condition
Current Transfer Ratio	CTR	50	-	200	%	I _F = 5mA, V _{CE} = 5V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	-	-	0.35	V	I _F = 5mA, I _C = 0.4mA
Isolation Resistance	R _{IO}	5×10 ¹⁰	-	-	Ω	V _{IO} = 500Vdc, 40~60% R.H.
Floating Capacitance	C _{IO}	-	0.6	1.0	pF	V _{IO} = 0, f = 1MHz
Turn-on Time	t _{on}	-	-	25	µs	V _{CC} = 5V, I _F = 5mA, R _L = 5kΩ
Turn-off Time	t _{off}	-	-	25	µs	

* Typical values at T_a = 25°C

Typical Electro-Optical Characteristics Curves

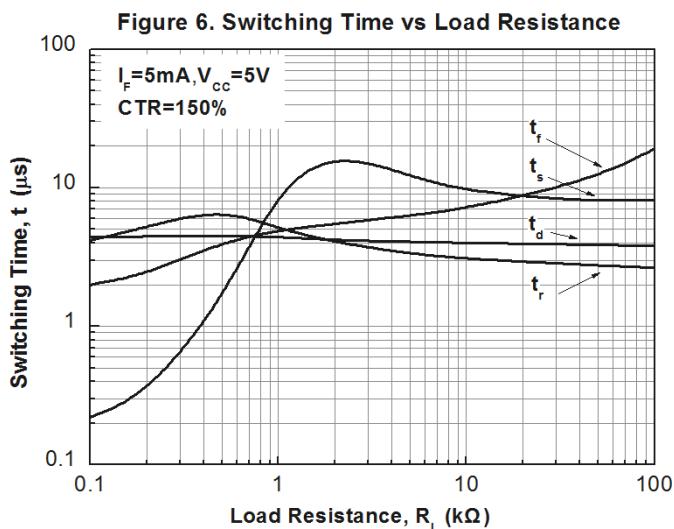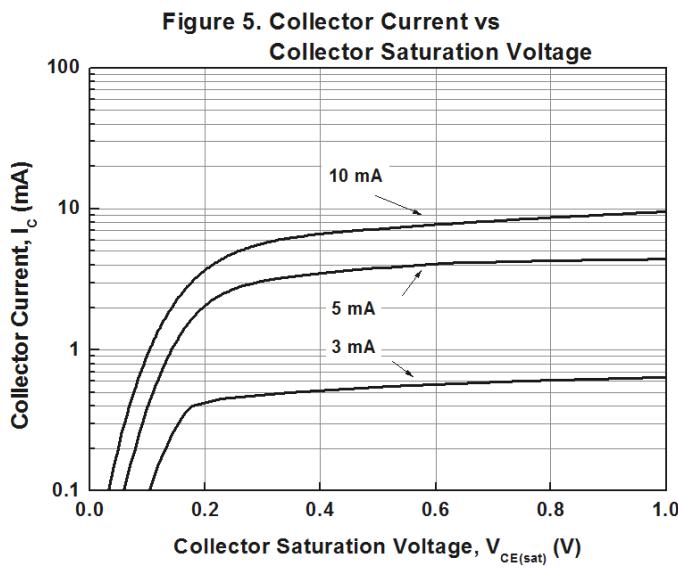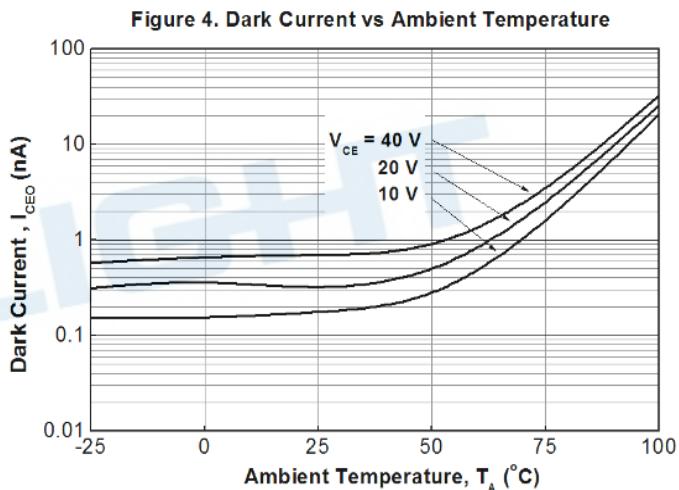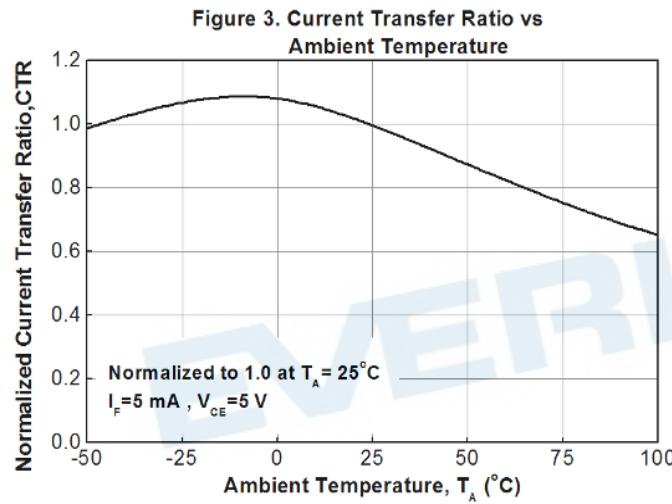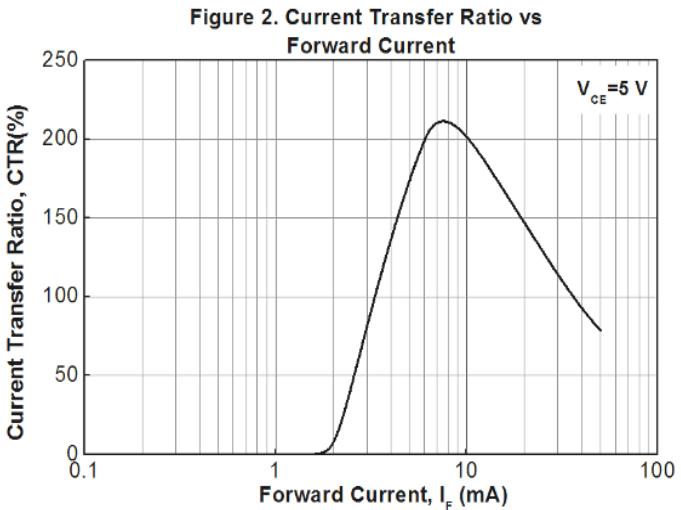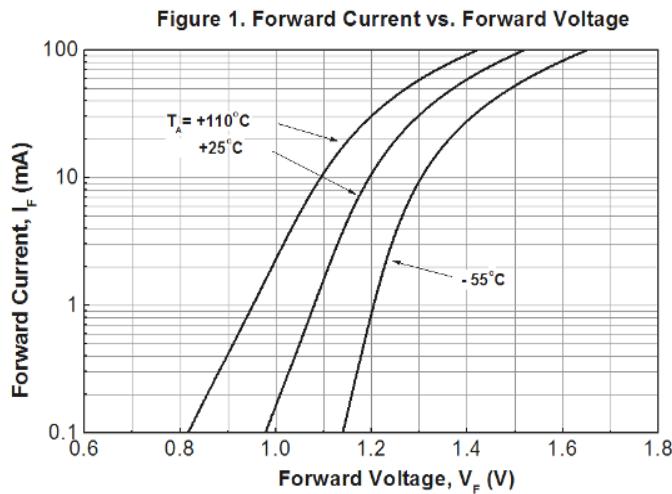

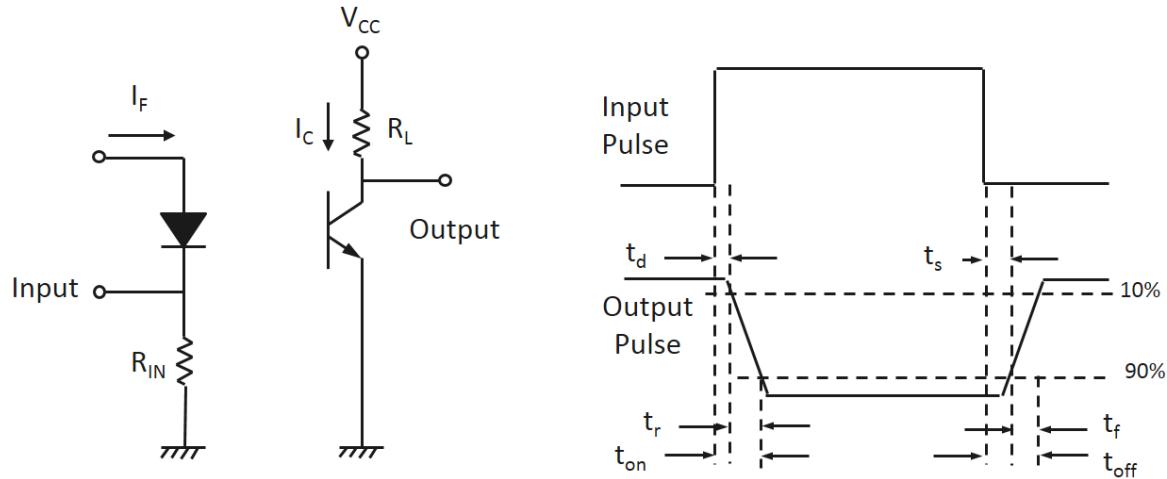


Figure 7. Switching Time Test Circuit & Waveforms

Order Information

Part Number

EL2514X(Y)-VG




Note

X = Lead form option (S1, S2, M or none)
Y = Tape and reel option (TU, TD or none)
V = VDE safety (optional)
G = Halogens free




Option	Description	Packing quantity
None	Standard DIP-4	100 units per tube
M	Wide lead bend (0.4 inch spacing)	100 units per tube
S1 (TU)	Surface mount lead form (low profile) + TU tape & reel option	1500 units per reel
S1 (TD)	Surface mount lead form (low profile) + TD tape & reel option	1500 units per reel
S2 (TU)	Surface mount lead form (low profile) + TU tape & reel option	2000 units per reel
S2 (TD)	Surface mount lead form (low profile) + TD tape & reel option	2000 units per reel



Package Dimension (Dimensions in mm)

Standard DIP Type

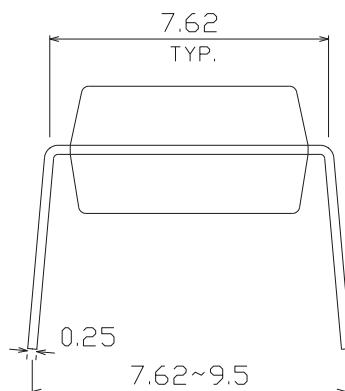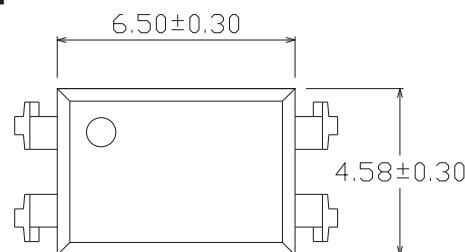


Option M Type

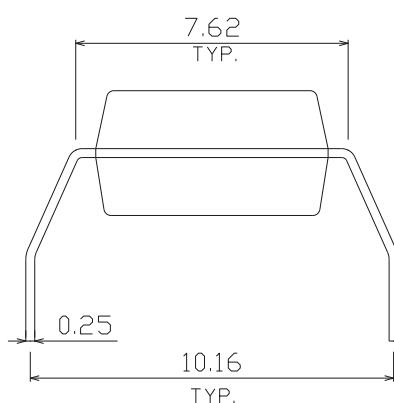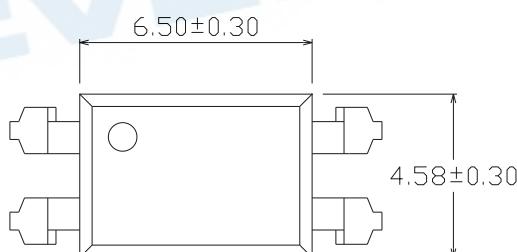

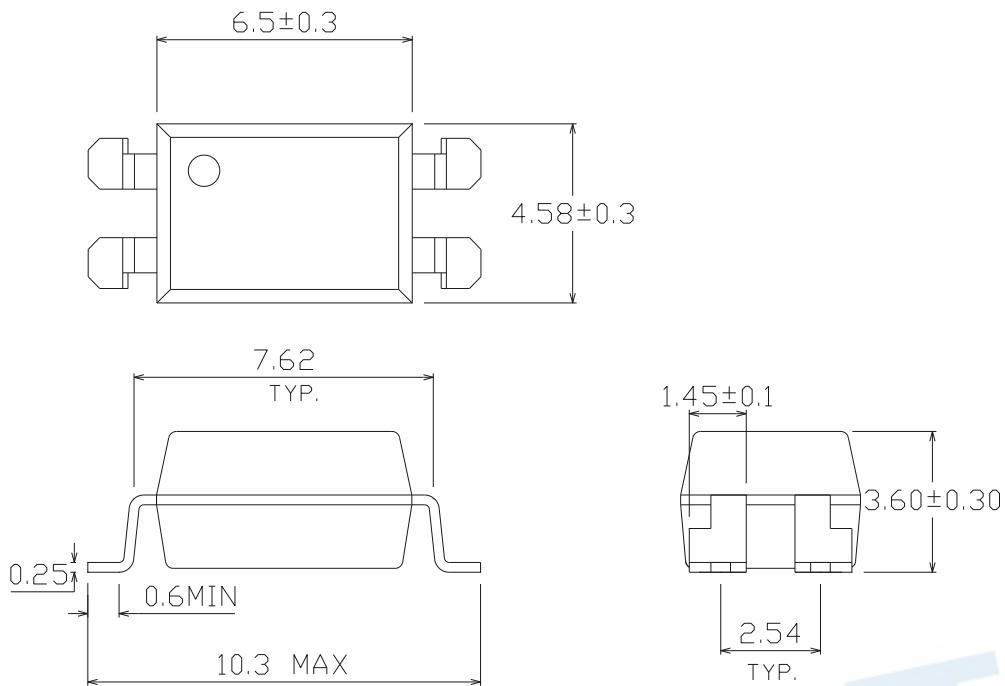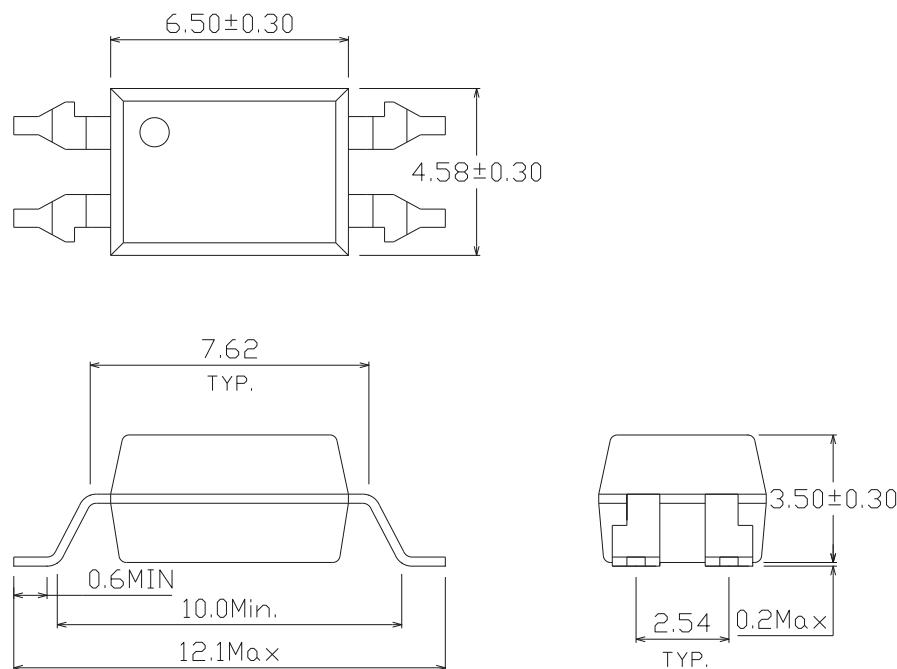
Option S1 Type**Option S2 Type**

Recommended pad layout for surface mount leadform

For S1 option

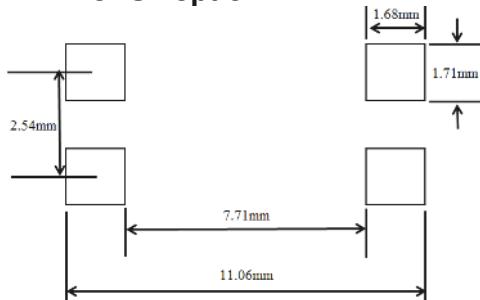

For S2 option

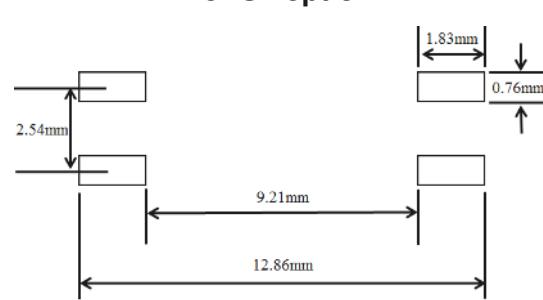

Notes

Suggested pad dimension is just for reference only.
Please modify the pad dimension based on individual need.

Device Marking





Notes


EL	denotes EVERLIGHT
2514	denotes Device Number
G	denotes Green part
Y	denotes 1 digit Year code
WW	denotes 2 digit Week code
V	denotes VDE (optional)

Tape & Reel Packing Specifications



Option TD

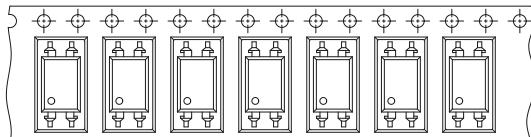

Direction of feed from reel




Option TU

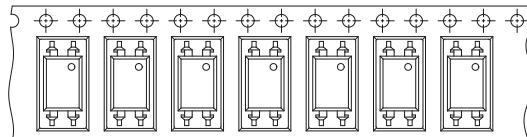

Direction of feed from reel



Tape dimensions

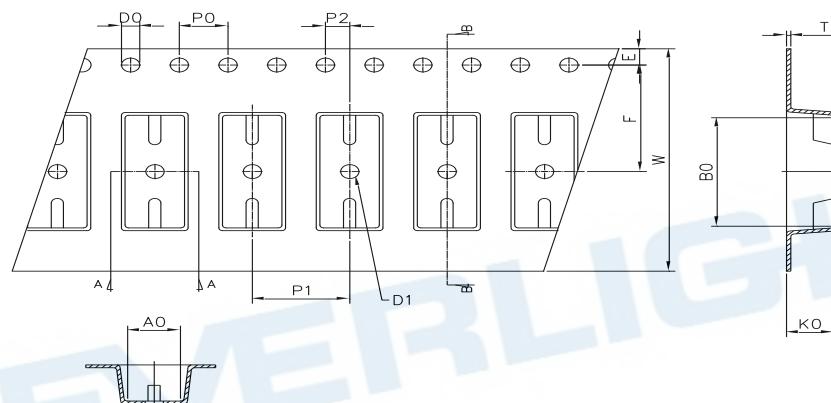


Dimension No.	Ao	Bo	Do	D1	E	F
Dimension (mm) S1	4.90±0.1	10.40±0.1	1.5±0.1	1.50±0.1	1.75±0.1	7.50±0.1
Dimension (mm) S2	4.88±0.1	12.55±0.1	1.5±0.1	1.50±0.1	1.75±0.1	11.5±0.1
Dimension No.	Po	P1	P2	t	W	Ko
Dimension (mm) S1	4.00±0.1	8.00±0.1	2.00±0.1	0.40±0.1	16.00±0.3	4.60±0.1
Dimension (mm) S2	4.00±0.1	8.00±0.1	2.00±0.1	0.40±0.1	24.00±0.3	4.00±0.1

Precautions for Use

1. Soldering Condition

1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

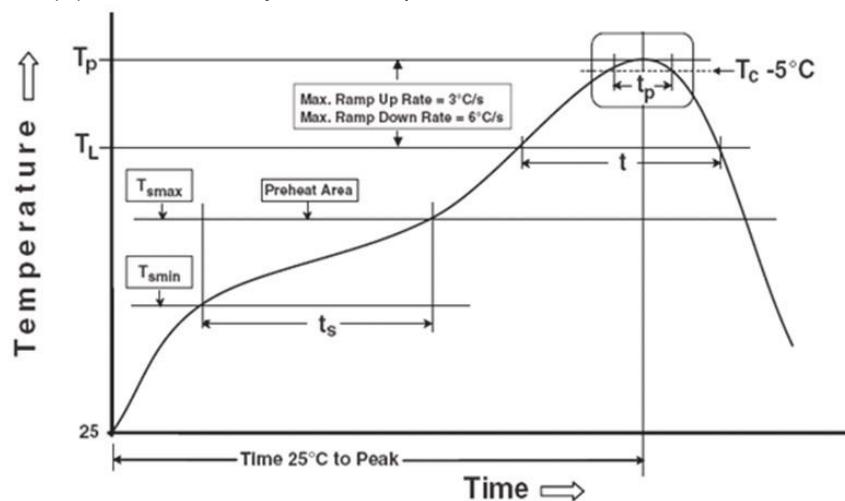

Note:

Reference: IPC/JEDEC J-STD-020D

Preheat

Temperature min (T_{smin})	150 °C
Temperature max (T_{smax})	200°C
Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max

Other

Liquidus Temperature (T_L)	217 °C
Time above Liquidus Temperature (t_L)	60-100 sec
Peak Temperature (T_p)	260°C
Time within 5 °C of Actual Peak Temperature: $T_p - 5^\circ\text{C}$	30 s
Ramp- Down Rate from Peak Temperature	6°C /second max.
Time 25°C to peak temperature	8 minutes max.
Reflow times	3 times

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
3. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
4. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.
5. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.
6. Statements regarding the suitability of products for certain types of applications are based on Everlight's knowledge of typical requirements that are often placed on Everlight products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Everlight's terms and conditions of purchase, including but not limited to the warranty expressed therein.