



# Photointerrupter

## Product Data Sheet

### LTH-872-N55H

Spec No.: DS55-2015-0007

Effective Date: 05/29/2015

Revision: -

**LITE-ON DCC**

**RELEASE**

## Photointerrupter LTH-872-N55H


### 1. Description

Photointerrupters consist of infrared emitters and photo detectors in slotted, reflective and actuator type switches with connectors. Featuring high reliability, accuracy and special custom-tailored devices to fulfill various sensor requirements such as facsimile machine, copy machine, printer, scanner... etc. Our skilled team of specialists with engineering expertise is ready to offer fast support for the requirements of custom-made parts and co-development with customers.

#### 1. 1. Features

- Non-contact Switching
- For Direct PC Board or Dual-in-line Socket Mounting
- Fast Switching Speed

### 2. Outline Dimensions

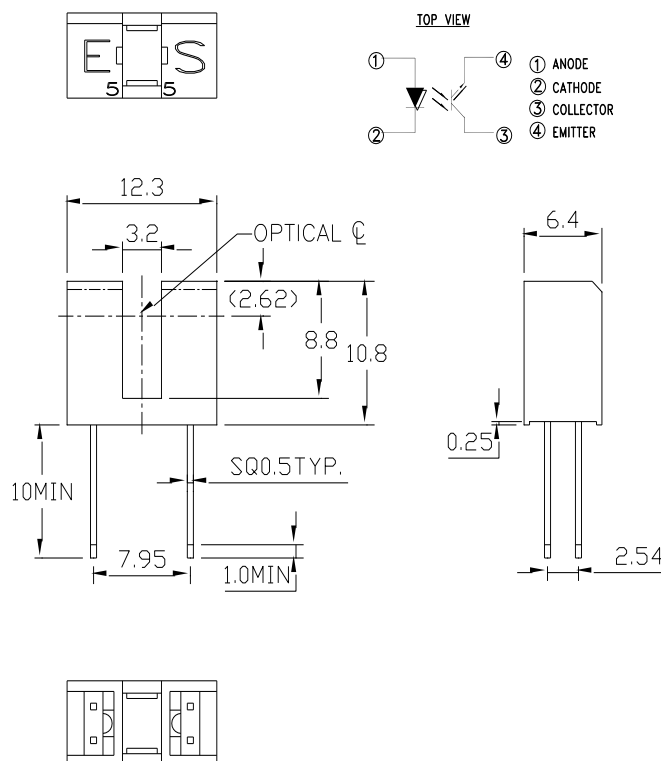

#### Notes :

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.25\text{mm}$  unless otherwise noted.
3. Specifications are subject to change without notice.

## Photointerrupter LTH-872-N55H

### 3. Absolute Maximum Ratings at TA=25°C

| Parameter                                            | Maximum Rating      | Unit |
|------------------------------------------------------|---------------------|------|
| INPUT LED                                            |                     |      |
| Power Dissipation                                    | 75                  | mW   |
| Continuous Forward Current                           | 50                  | mA   |
| Reverse Voltage                                      | 5                   | V    |
| OUTPUT PHOTOTRANSISTOR                               |                     |      |
| Power Dissipation                                    | 100                 | mW   |
| Collector-Emitter Voltage                            | 30                  | V    |
| Emitter-Collector Voltage                            | 5                   | V    |
| Collector Current                                    | 20                  | mA   |
| Operating Temperature Range                          | -25°C to + 85°C     |      |
| Storage Temperature Range                            | -40°C to + 100°C    |      |
| Lead Soldering Temperature [1.6mm (.063") Form Case] | 260°C for 5 Seconds |      |

### 4. Electrical / Optical Characteristics at TA=25°C

| Parameter                            |           | Symbol               | Min. | Typ. | Max. | Unit | Test Condition                                                        |
|--------------------------------------|-----------|----------------------|------|------|------|------|-----------------------------------------------------------------------|
| INPUT LED                            |           |                      |      |      |      |      |                                                                       |
| Forward Voltage                      |           | V <sub>F</sub>       | -    | 1.2  | 1.6  | V    | I <sub>F</sub> = 20mA                                                 |
| Reverse Current                      |           | I <sub>R</sub>       | -    | -    | 100  | μA   | V <sub>R</sub> = 5V                                                   |
| OUTPUT PHOTOTRANSISTOR               |           |                      |      |      |      |      |                                                                       |
| Collector-Emitter Dark Current       |           | I <sub>CEO</sub>     | -    | -    | 100  | nA   | V <sub>CE</sub> = 10V                                                 |
| COUPLER                              |           |                      |      |      |      |      |                                                                       |
| Collector Emitter Saturation Voltage |           | V <sub>CE(SAT)</sub> | -    | -    | 0.4  | V    | I <sub>C</sub> = 0.25mA<br>I <sub>F</sub> = 20mA                      |
| On State Collector Current           |           | I <sub>C(ON)</sub>   | 2.0  | -    | -    | mA   | V <sub>CE</sub> = 5V<br>I <sub>F</sub> = 20mA                         |
| Response Time                        | Rise Time | Tr                   | -    | 3    | 15   | μS   | V <sub>CC</sub> = 5V<br>I <sub>C</sub> = 2mA<br>R <sub>L</sub> = 100Ω |
|                                      | Fall Time | Tf                   | -    | 4    | 20   |      |                                                                       |

# Photointerrupter LTH-872-N55H

## 5. Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Power Dissipation vs. Ambient Temperature

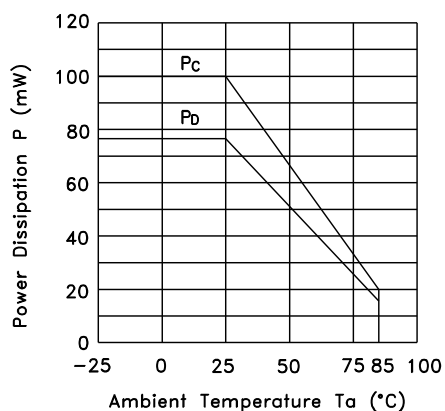


Fig.2 Forward Current vs. Forward Voltage

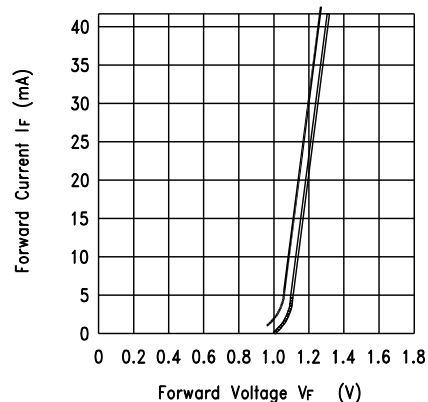


Fig.3 Collector Current vs. Collector-emitter Voltage


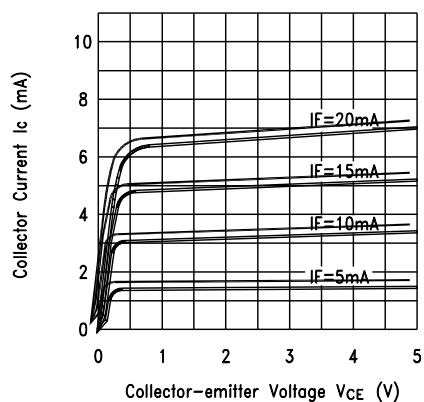


Fig.4 Collector Current vs. Ambient Temperature

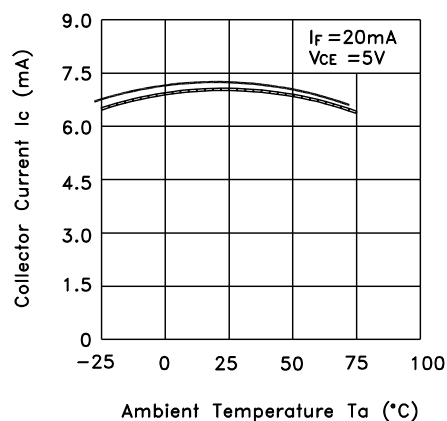

# Photointerrupter LTH-872-N55H

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature


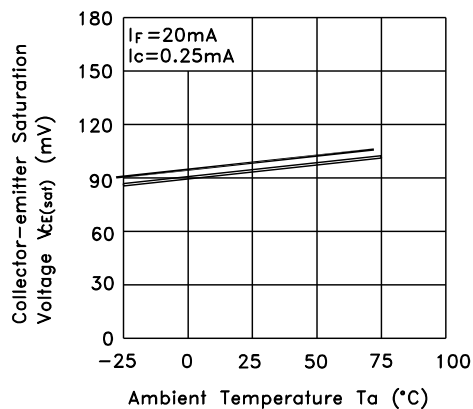


Fig.6 Response Time vs. Load Resistance



Test Circuit for Response Time

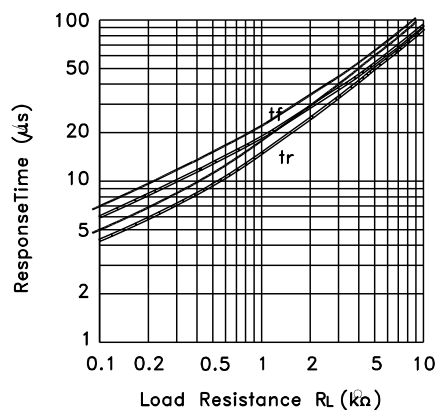