

## SMD ▪ High Power LED XI5050U/LKE-HXXXXX260Z18/2N



### Features

- Top view white LED
- High luminous intensity output
- Typical Viewing Angle:120°
- Pb-free
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free .(Br<900ppm,Cl<900ppm,Br+Cl<1500ppm)

### Description


The 5050 package is a lighting grade high power LED. It is a compact package with high lumens and efficiency and is suitable for many lighting applications.

### Applications

- Decorative and Entertainment Lighting
- Agriculture Lighting
- General use
- Illumination

## Product Number Explanation

**XI5050U/LKE-HXXXXXXZ18/2N**

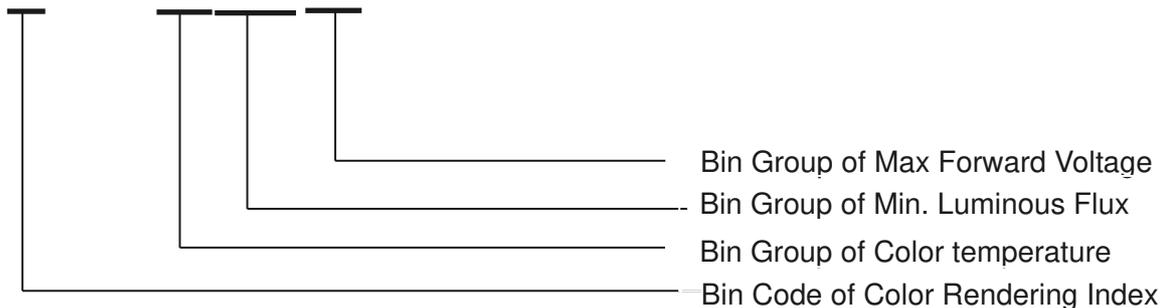

## Table of Color Rendering Index

| Symbol | Description                   |
|--------|-------------------------------|
| M      | CRI(Min.) : 60                |
| N      | CRI(Min.) : 65                |
| L      | CRI(Min.) : 70                |
| Q      | CRI(Min.) : 75                |
| K      | CRI(Min.) : 80                |
| P      | CRI(Min.) : 85                |
| H      | CRI(Min.) : 90                |
| R      | CRI(Min.) : 90, R9(Min.) : 50 |

Note:  
Tolerance of Color Rendering Index:  $\pm 2$

## Table of Forward Current Index

| Symbol | Description           |
|--------|-----------------------|
| Z18    | I <sub>F</sub> :180mA |

## Table of Forward Voltage Index

| Symbol | Description |
|--------|-------------|
| 260    | 26V max     |

Example:  
XI5050U/LKE-H50780260Z18/2N

|                |            |
|----------------|------------|
| Ra             | 70(Min.)   |
| CCT            | 5000K      |
| Flux           | 780lm(Min) |
| V <sub>F</sub> | 26V(Max)   |
| I <sub>F</sub> | 180mA      |

## Mass Production List

| CCT(K) | Product                     | Ra<br>Min. (1) | $\Phi$ (lm)<br>Min. (2) | VF<br>Max. (3) |
|--------|-----------------------------|----------------|-------------------------|----------------|
| 2700   | XI5050U/LKE-H27700260Z18/2N | 70             | 700                     | 26             |
| 3000   | XI5050U/LKE-H30730260Z18/2N | 70             | 730                     | 26             |
| 3500   | XI5050U/LKE-H35750260Z18/2N | 70             | 750                     | 26             |
| 4000   | XI5050U/LKE-H40780260Z18/2N | 70             | 780                     | 26             |
| 5000   | XI5050U/LKE-H50780260Z18/2N | 70             | 780                     | 26             |
| 5700   | XI5050U/LKE-H57780260Z18/2N | 70             | 780                     | 26             |
| 6500   | XI5050U/LKE-H65750260Z18/2N | 70             | 750                     | 26             |

Notes:

1. Tolerance of Color Rendering Index:  $\pm 2$
2. Tolerance of Luminous flux:  $\pm 11\%$ .
3. Tolerance of Forward Voltage:  $\pm 0.1V$

EVERLIGHT

## Device Selection Guide

| Chip Materials | Emitted Color                             | Resin Color |
|----------------|---|-------------|
| InGaN          | Cool White<br>Neutral White<br>Warm White | Water Clear |

## Absolute Maximum Ratings (T<sub>Soldering</sub>=25°C)

| Parameter                            | Symbol                   | Rating   | Unit |
|--------------------------------------|--------------------------|--|------|
| Forward Current                      | I <sub>F</sub>           | 200  | mA   |
| Power Dissipation                    | P <sub>d</sub>           | 5.2  | W    |
| Pulse Forward Current                | IPF                      | 280  | mA   |
| Operating Temperature                | T <sub>opr</sub>         | -35 ~ +85  | °C   |
| Storage Temperature                  | T <sub>stg</sub>         | -35 ~ +100   | °C   |
| Thermal Resistance Junction to Board | R $\theta$ <sub>jc</sub> | 10   | °C/W |
| Junction Temperature                 | T <sub>j</sub>           | 125  | °C   |
| Soldering Temperature                | T <sub>sol</sub>         | Reflow Soldering: 260 °C for 10 sec.<br>Hand Soldering : 350 °C for 3 sec. |      |

### Note:

The products are sensitive to static electricity and must be carefully taken when handling products

## Electro-Optical Characteristics (T<sub>Soldering</sub>=25°C)

| Parameter                            | Symbol                    | Min.  | Typ.  | Max.  | Unit    | Condition             |
|--------------------------------------|---------------------------|-------|-------|-------|---------|-----------------------|
| Luminous Flux <sup>(1)</sup>         | $\Phi$                    | 700   | ----- | ---   | lm      | I <sub>F</sub> =180mA |
| Forward Voltage <sup>(2)</sup>       | V <sub>F</sub>            | ---   | ----- | 26    | V       | I <sub>F</sub> =180mA |
| Color Rendering Index <sup>(3)</sup> | Ra                        | 70    | ----  | ----  |         | I <sub>F</sub> =180mA |
| Viewing Angle                        | 2 $\theta$ <sub>1/2</sub> | ----- | 120   | ----- | deg     | I <sub>F</sub> =180mA |
| Reverse Current                      | I <sub>R</sub>            | ----- | ----- | 50    | $\mu$ A | V <sub>R</sub> =5V    |

1. Tolerance of Luminous flux:  $\pm$ 11%.

2. Tolerance of Forward Voltage:  $\pm$ 0.1V

3. Tolerance of Color Rendering Index:  $\pm$ 2

## Bin Range of Luminous Flux 2700k

| Bin Code | Min. | Max. | Unit | Condition             |
|----------|------|------|------|-----------------------|
| 700L50   | 700  | 750  | lm   | I <sub>F</sub> =180mA |
| 750L50   | 750  | 800  |      |                       |
| 800L50   | 800  | 850  |      |                       |
| 850L50   | 850  | 900  |      |                       |

## 3000k

| Bin Code | Min. | Max. | Unit | Condition             |
|----------|------|------|------|-----------------------|
| 730L50   | 730  | 780  | lm   | I <sub>F</sub> =180mA |
| 780L50   | 780  | 830  |      |                       |
| 830L50   | 830  | 880  |      |                       |
| 880L50   | 880  | 930  |      |                       |

## 3500k/6500k

| Bin Code | Min. | Max. | Unit | Condition             |
|----------|------|------|------|-----------------------|
| 750L50   | 750  | 800  | lm   | I <sub>F</sub> =180mA |
| 800L50   | 800  | 850  |      |                       |
| 850L50   | 850  | 900  |      |                       |
| 900L50   | 900  | 950  |      |                       |

## 4000k/5000k/5700k

| Bin Code | Min. | Max. | Unit | Condition             |
|----------|------|------|------|-----------------------|
| 780L50   | 780  | 830  | lm   | I <sub>F</sub> =180mA |
| 830L50   | 830  | 880  |      |                       |
| 880L50   | 880  | 930  |      |                       |
| 930L50   | 930  | 980  |      |                       |

Note:

Tolerance of Luminous flux:  $\pm 11\%$ .


## Bin Range of Forward Voltage

| Group | Bin Code | Min. | Max. | Unit | Condition             |
|-------|----------|------|------|------|-----------------------|
| 22-26 | 22J      | 22   | 23   | V    | I <sub>F</sub> =180mA |
|       | 23J      | 23   | 24   |      |                       |
|       | 24J      | 24   | 25   |      |                       |
|       | 25J      | 25   | 26   |      |                       |

Note:

Tolerance of Forward Voltage:  $\pm 0.1V$

## The C.I.E. 1931 Chromaticity Diagram

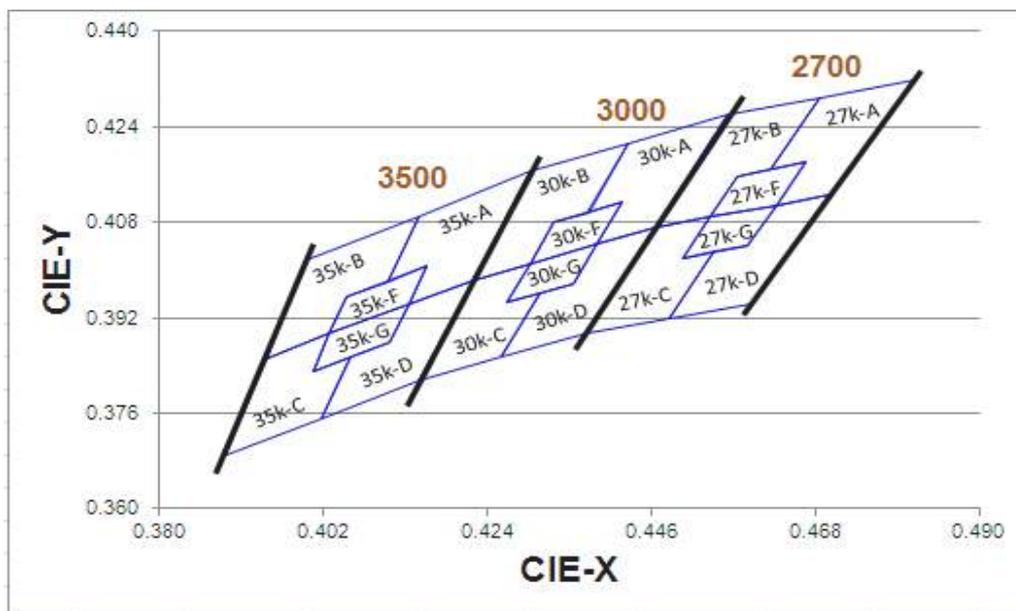


### Bin Range of Chromaticity Coordinates

| CCT                          | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|------------------------------|-----------------------------|--------|--------|----------|--------|--------|--|
| 2700K                        | 27K-A                       | 0.4813 | 0.4319 | 27K-D    | 0.4700 | 0.4126 |  |
|                              |                             | 0.4687 | 0.4289 |          | 0.4627 | 0.4109 |  |
|                              |                             | 0.4621 | 0.4169 |          | 0.4588 | 0.4041 |  |
|                              |                             | 0.4667 | 0.4180 |          | 0.4544 | 0.4030 |  |
|                              |                             | 0.4627 | 0.4109 |          | 0.4483 | 0.3919 |  |
|                              |                             | 0.4700 | 0.4126 |          | 0.4593 | 0.3944 |  |
|                              | Reference Range:2580K~2700K |        |        |          |        |        |  |
|                              | 27K-B                       | 0.4687 | 0.4289 | 27K-C    | 0.4465 | 0.4071 |  |
|                              |                             | 0.4562 | 0.4260 |          | 0.4373 | 0.3893 |  |
|                              |                             | 0.4465 | 0.4071 |          | 0.4483 | 0.3919 |  |
|                              |                             | 0.4539 | 0.4088 |          | 0.4544 | 0.4030 |  |
|                              |                             | 0.4576 | 0.4158 |          | 0.4502 | 0.4020 |  |
|                              |                             | 0.4621 | 0.4169 |          | 0.4539 | 0.4088 |  |
|                              | Reference Range:2700K~2870K |        |        |          |        |        |  |
|                              | 27K-F                       | 0.4667 | 0.4180 | 27K-G    | 0.4627 | 0.4109 |  |
|                              |                             | 0.4576 | 0.4158 |          | 0.4539 | 0.4088 |  |
|                              |                             | 0.4539 | 0.4088 |          | 0.4502 | 0.4020 |  |
|                              |                             | 0.4627 | 0.4109 |          | 0.4588 | 0.4041 |  |
| Reference Range: 2665K~2770K |                             |        |        |          |        |        |  |

| CCT                         | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-----------------------------|-----------------------------|--------|--------|----------|--------|--------|--|
| 3000K                       | 30K-A                       | 0.4562 | 0.4260 | 30K-D    | 0.4465 | 0.4071 |  |
|                             |                             | 0.4430 | 0.4212 |          | 0.4388 | 0.4043 |  |
|                             |                             | 0.4375 | 0.4096 |          | 0.4355 | 0.3977 |  |
|                             |                             | 0.4422 | 0.4113 |          | 0.4311 | 0.3962 |  |
|                             |                             | 0.4388 | 0.4043 |          | 0.4259 | 0.3853 |  |
|                             |                             | 0.4465 | 0.4071 |          | 0.4373 | 0.3893 |  |
|                             | Reference Range:2870K~3000K |        |        |          |        |        |  |
|                             | 30K-B                       | 0.4430 | 0.4212 | 30K-C    | 0.4221 | 0.3984 |  |
|                             |                             | 0.4299 | 0.4165 |          | 0.4147 | 0.3814 |  |
|                             |                             | 0.4221 | 0.3984 |          | 0.4259 | 0.3853 |  |
|                             |                             | 0.4297 | 0.4011 |          | 0.4311 | 0.3962 |  |
|                             |                             | 0.4328 | 0.4079 |          | 0.4267 | 0.3946 |  |
|                             |                             | 0.4375 | 0.4096 |          | 0.4297 | 0.4011 |  |
|                             | Reference Range:3000K~3220K |        |        |          |        |        |  |
|                             | 30K-F                       | 0.4422 | 0.4113 | 30K-G    | 0.4388 | 0.4043 |  |
|                             |                             | 0.4328 | 0.4079 |          | 0.4297 | 0.4011 |  |
|                             |                             | 0.4297 | 0.4011 |          | 0.4267 | 0.3946 |  |
|                             |                             | 0.4388 | 0.4043 |          | 0.4355 | 0.3977 |  |
| Reference Range:2960K~3080K |                             |        |        |          |        |        |  |

| CCT                         | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-----------------------------|-----------------------------|--------|--------|----------|--------|--------|--|
| 3500K                       | 35K-A                       | 0.4299 | 0.4165 | 35K-D    | 0.4221 | 0.3984 |  |
|                             |                             | 0.4148 | 0.4090 |          | 0.4134 | 0.3943 |  |
|                             |                             | 0.4106 | 0.3981 |          | 0.4108 | 0.3878 |  |
|                             |                             | 0.4159 | 0.4007 |          | 0.4057 | 0.3853 |  |
|                             |                             | 0.4134 | 0.3943 |          | 0.4018 | 0.3752 |  |
|                             |                             | 0.4221 | 0.3984 |          | 0.4147 | 0.3814 |  |
|                             | Reference Range:3220K~3500K |        |        |          |        |        |  |
|                             | 35K-B                       | 0.4148 | 0.4090 | 35K-C    | 0.3943 | 0.3853 |  |
|                             |                             | 0.3996 | 0.4015 |          | 0.3889 | 0.3690 |  |
|                             |                             | 0.3943 | 0.3853 |          | 0.4018 | 0.3752 |  |
|                             |                             | 0.4029 | 0.3893 |          | 0.4057 | 0.3853 |  |
|                             |                             | 0.4051 | 0.3954 |          | 0.4006 | 0.3829 |  |
|                             |                             | 0.4106 | 0.3981 |          | 0.4029 | 0.3893 |  |
|                             | Reference Range:3500K~3710K |        |        |          |        |        |  |
|                             | 35K-F                       | 0.4159 | 0.4007 | 35K-G    | 0.4134 | 0.3943 |  |
|                             |                             | 0.4051 | 0.3954 |          | 0.4029 | 0.3893 |  |
|                             |                             | 0.4029 | 0.3893 |          | 0.4006 | 0.3829 |  |
|                             |                             | 0.4134 | 0.3943 |          | 0.4108 | 0.3878 |  |
| Reference Range:3360K~3540K |                             |        |        |          |        |        |  |


## The C.I.E. 1931 Chromaticity Diagram

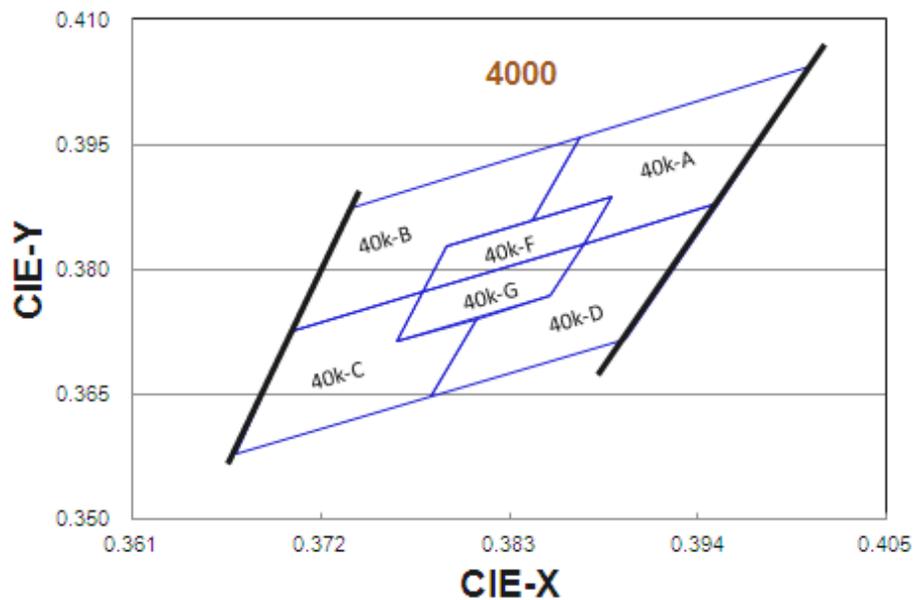

### Bin Range of Chromaticity Coordinates

| CCT                         | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-----------------------------|-----------------------------|--------|--------|----------|--------|--------|--|
| 4000K                       | 40K-A                       | 0.4006 | 0.4044 | 40K-D    | 0.3952 | 0.3880 |  |
|                             |                             | 0.3871 | 0.3959 |          | 0.3873 | 0.3831 |  |
|                             |                             | 0.3843 | 0.3858 |          | 0.3854 | 0.3768 |  |
|                             |                             | 0.3890 | 0.3887 |          | 0.3810 | 0.3741 |  |
|                             |                             | 0.3873 | 0.3831 |          | 0.3784 | 0.3647 |  |
|                             |                             | 0.3952 | 0.3880 |          | 0.3898 | 0.3716 |  |
|                             | Reference Range:3700K~3970K |        |        |          |        |        |  |
|                             | 40K-B                       | 0.3871 | 0.3959 | 40K-C    | 0.3703 | 0.3726 |  |
|                             |                             | 0.3736 | 0.3874 |          | 0.3670 | 0.3578 |  |
|                             |                             | 0.3703 | 0.3726 |          | 0.3784 | 0.3647 |  |
|                             |                             | 0.3779 | 0.3773 |          | 0.3810 | 0.3741 |  |
|                             |                             | 0.3793 | 0.3828 |          | 0.3764 | 0.3713 |  |
|                             |                             | 0.3843 | 0.3858 |          | 0.3779 | 0.3773 |  |
|                             | Reference Range:3970K~4270K |        |        |          |        |        |  |
|                             | 40K-F                       | 0.3890 | 0.3887 | 40K-G    | 0.3873 | 0.3831 |  |
|                             |                             | 0.3793 | 0.3828 |          | 0.3779 | 0.3773 |  |
|                             |                             | 0.3779 | 0.3773 |          | 0.3764 | 0.3713 |  |
|                             |                             | 0.3873 | 0.3831 |          | 0.3854 | 0.3768 |  |
| Reference Range:3870K~4080K |                             |        |        |          |        |        |  |

## The C.I.E. 1931 Chromaticity Diagram

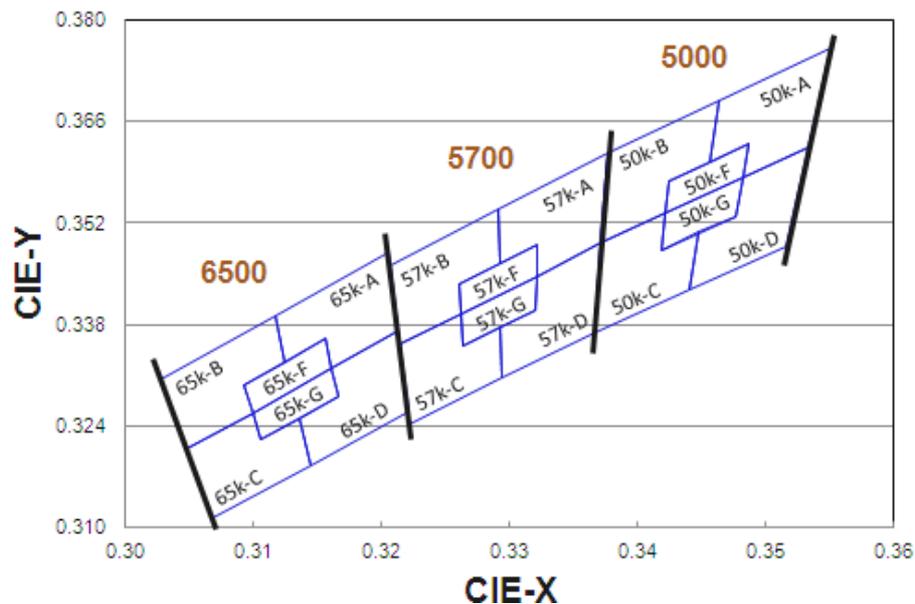

### Bin Range of Chromaticity Coordinates

| CCT   | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-------|-----------------------------|--------|--------|----------|--------|--------|--|
| 5000K | 50K-A                       | 0.3551 | 0.3760 | 50K-D    | 0.3533 | 0.3624 |  |
|       |                             | 0.3464 | 0.3688 |          | 0.3482 | 0.3583 |  |
|       |                             | 0.3456 | 0.3604 |          | 0.3477 | 0.3530 |  |
|       |                             | 0.3487 | 0.3629 |          | 0.3448 | 0.3507 |  |
|       |                             | 0.3482 | 0.3583 |          | 0.3441 | 0.3428 |  |
|       |                             | 0.3533 | 0.3624 |          | 0.3515 | 0.3487 |  |
|       | Reference Range:4745K~5000K |        |        |          |        |        |  |
|       | 50K-B                       | 0.3464 | 0.3688 | 50K-C    | 0.3371 | 0.3493 |  |
|       |                             | 0.3376 | 0.3616 |          | 0.3366 | 0.3369 |  |
|       |                             | 0.3371 | 0.3493 |          | 0.3441 | 0.3428 |  |
|       |                             | 0.3422 | 0.3533 |          | 0.3448 | 0.3507 |  |
|       |                             | 0.3425 | 0.3579 |          | 0.3418 | 0.3483 |  |
|       |                             | 0.3456 | 0.3604 |          | 0.3422 | 0.3533 |  |
|       | Reference Range:5000K~5310K |        |        |          |        |        |  |
|       | 50K-F                       | 0.3487 | 0.3629 | 50K-G    | 0.3482 | 0.3583 |  |
|       |                             | 0.3425 | 0.3579 |          | 0.3422 | 0.3533 |  |
|       |                             | 0.3422 | 0.3533 |          | 0.3418 | 0.3483 |  |
|       |                             | 0.3482 | 0.3583 |          | 0.3477 | 0.3530 |  |
|       | Reference Range:4910K~5120K |        |        |          |        |        |  |

## Bin Range of Chromaticity Coordinates


| CCT   | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-------|-----------------------------|--------|--------|----------|--------|--------|--|
| 5700K | 57K-A                       | 0.3376 | 0.3616 | 57K-D    | 0.3371 | 0.3493 |  |
|       |                             | 0.3292 | 0.3539 |          | 0.3321 | 0.3447 |  |
|       |                             | 0.3292 | 0.3464 |          | 0.3320 | 0.3401 |  |
|       |                             | 0.3321 | 0.3490 |          | 0.3293 | 0.3377 |  |
|       |                             | 0.3321 | 0.3447 |          | 0.3294 | 0.3306 |  |
|       |                             | 0.3371 | 0.3493 |          | 0.3366 | 0.3369 |  |
|       | Reference Range:5310K~5700K |        |        |          |        |        |  |
|       | 57K-B                       | 0.3292 | 0.3539 | 57K-C    | 0.3215 | 0.3353 |  |
|       |                             | 0.3207 | 0.3462 |          | 0.3222 | 0.3243 |  |
|       |                             | 0.3215 | 0.3353 |          | 0.3294 | 0.3306 |  |
|       |                             | 0.3262 | 0.3395 |          | 0.3293 | 0.3377 |  |
|       |                             | 0.3261 | 0.3436 |          | 0.3263 | 0.335  |  |
|       |                             | 0.3292 | 0.3464 |          | 0.3262 | 0.3395 |  |
|       | Reference Range:5700K~6020K |        |        |          |        |        |  |
|       | 57K-F                       | 0.3321 | 0.3490 | 57K-G    | 0.3321 | 0.3447 |  |
|       |                             | 0.3261 | 0.3436 |          | 0.3262 | 0.3395 |  |
|       |                             | 0.3262 | 0.3395 |          | 0.3263 | 0.3350 |  |
|       |                             | 0.3321 | 0.3447 |          | 0.3320 | 0.3401 |  |
|       | Reference Range:5520K~5780K |        |        |          |        |        |  |

| CCT   | Bin Code                    | CIE_x  | CIE_y  | Bin Code | CIE_x  | CIE_y  |  |
|-------|-----------------------------|--------|--------|----------|--------|--------|--|
| 6500K | 65K-A                       | 0.3205 | 0.3481 | 65K-D    | 0.3213 | 0.3371 |  |
|       |                             | 0.3117 | 0.3393 |          | 0.3161 | 0.3320 |  |
|       |                             | 0.3125 | 0.3328 |          | 0.3166 | 0.3281 |  |
|       |                             | 0.3157 | 0.3360 |          | 0.3136 | 0.3251 |  |
|       |                             | 0.3161 | 0.3320 |          | 0.3145 | 0.3187 |  |
|       |                             | 0.3213 | 0.3371 |          | 0.3221 | 0.3261 |  |
|       | Reference Range:6020K~6500K |        |        |          |        |        |  |
|       | 65K-B                       | 0.3117 | 0.3393 | 65K-C    | 0.3048 | 0.3209 |  |
|       |                             | 0.3028 | 0.3304 |          | 0.3068 | 0.3113 |  |
|       |                             | 0.3048 | 0.3209 |          | 0.3145 | 0.3187 |  |
|       |                             | 0.3100 | 0.3259 |          | 0.3136 | 0.3251 |  |
|       |                             | 0.3093 | 0.3297 |          | 0.3106 | 0.3222 |  |
|       |                             | 0.3125 | 0.3328 |          | 0.31   | 0.3259 |  |
|       | Reference Range:6500K~7050K |        |        |          |        |        |  |
|       | 65K-F                       | 0.3157 | 0.3360 | 65K-G    | 0.3161 | 0.3320 |  |
|       |                             | 0.3093 | 0.3297 |          | 0.3100 | 0.3259 |  |
|       |                             | 0.3100 | 0.3259 |          | 0.3106 | 0.3222 |  |
|       |                             | 0.3161 | 0.3320 |          | 0.3166 | 0.3281 |  |
|       | Reference Range:6300K~6690K |        |        |          |        |        |  |

## Note:


1. The value is based on driving current by 180mA.
2. Tolerance of Chromaticity Coordinates:  $\pm 0.01$ .

## Spectrum Distribution

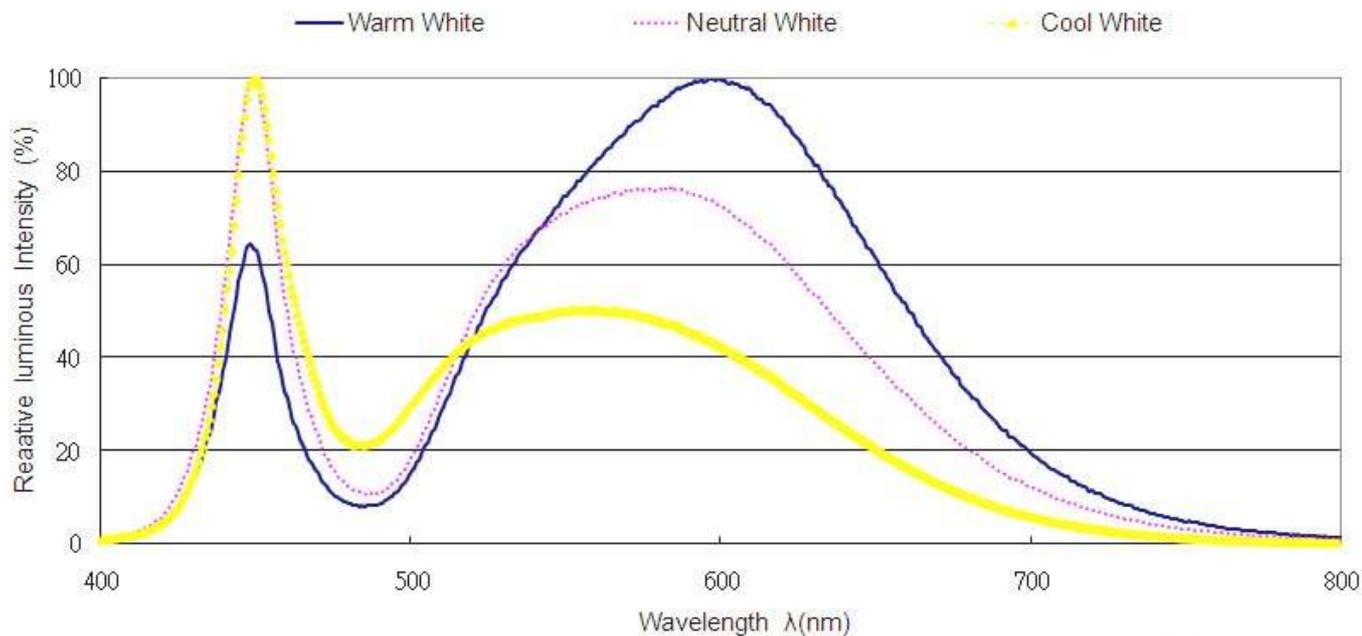


## Typical Electro-Optical Characteristics Curves

**Fig.1 – Forward Voltage Shift vs. Junction Temperature**

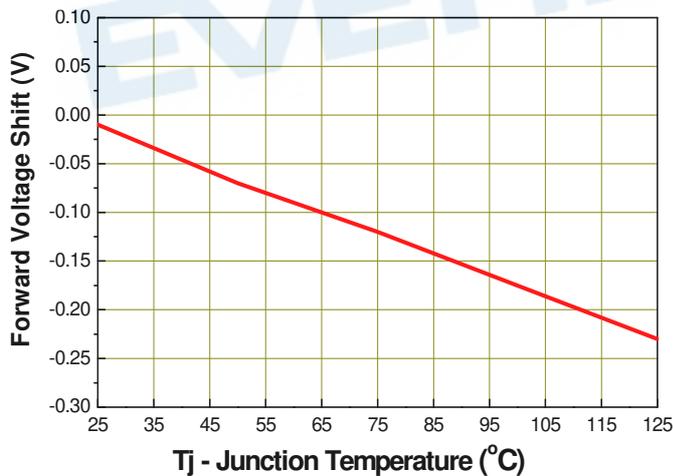


**Fig.2 - Relative Luminous Intensity vs. Forward Current**

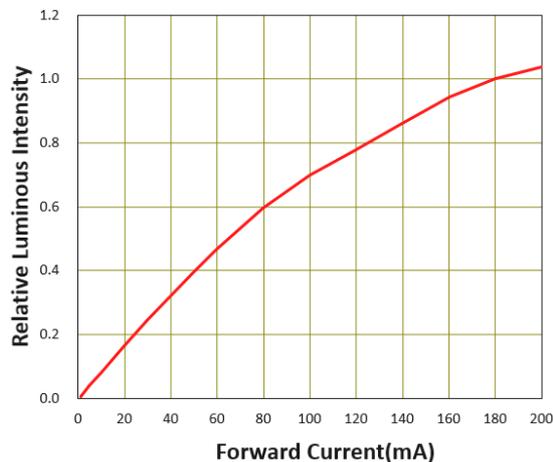


## Typical Electro-Optical Characteristics Curves

**Fig.3 - Relative Luminous Intensity vs. Junction Temperature**

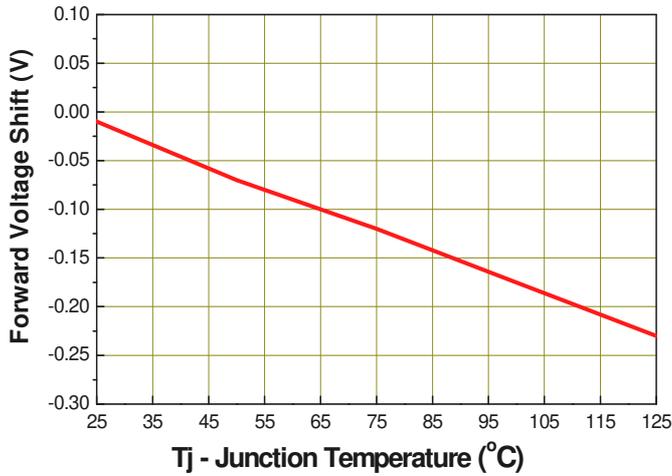


**Fig.4 - Forward Current vs. Forward Voltage**

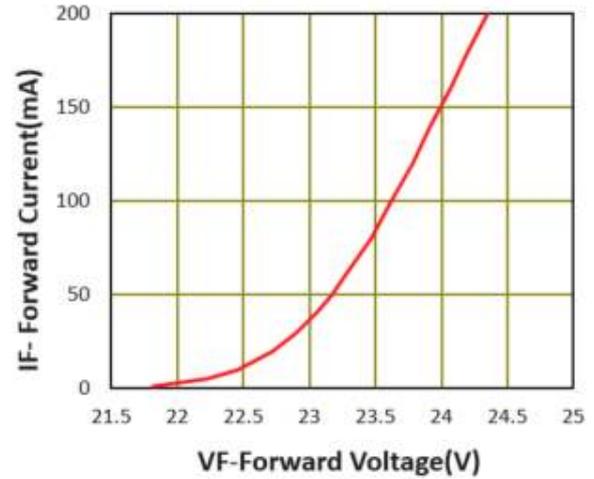


**Fig.5 – Max. Driving Forward Current vs. Soldering Temperature**

$R_{th\ j-s} = 10\ ^\circ\text{C/W}$

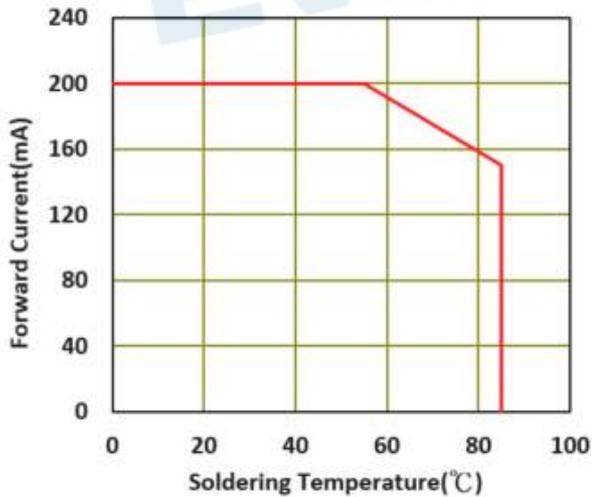



**Fig.6 – Radiation Diagram**

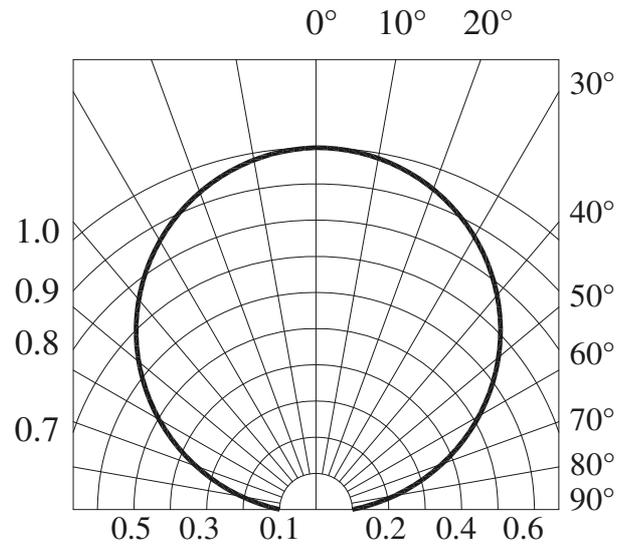





### Notes:

1.  $2\theta_{1/2}$  is the off XIs angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is  $\pm 5^\circ$

### Package Dimension

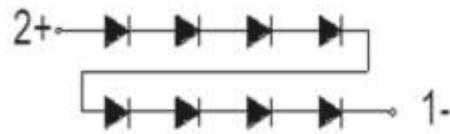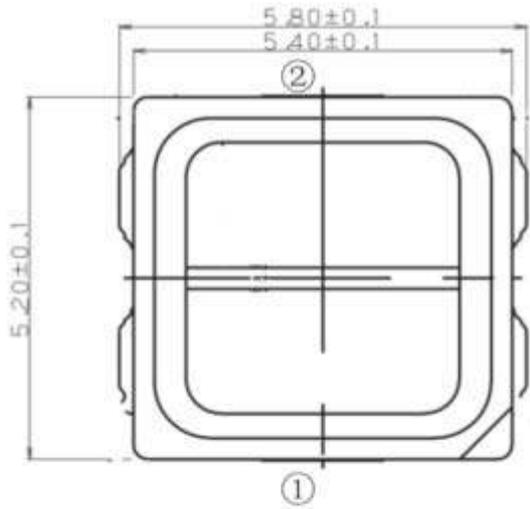

Polarity

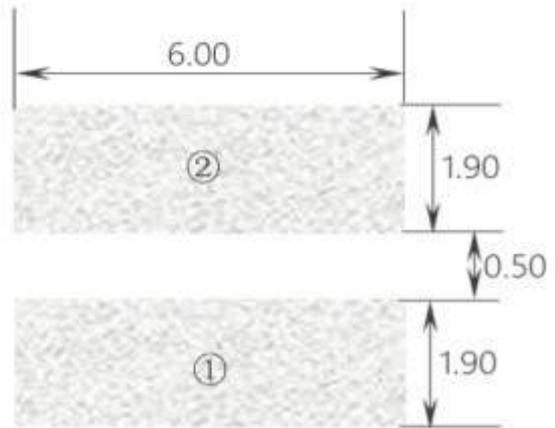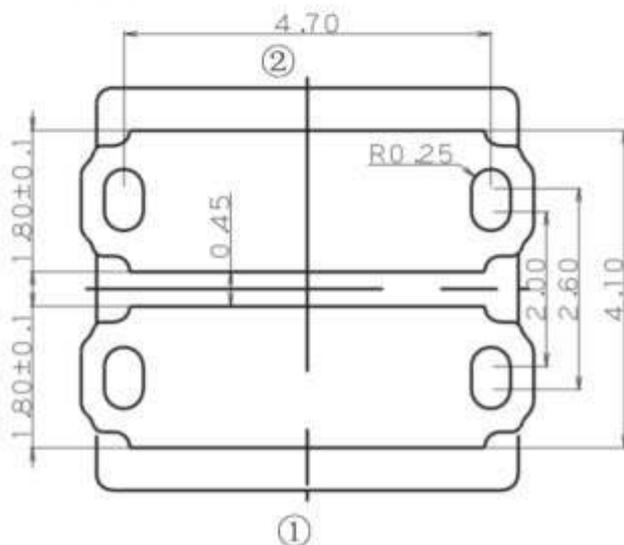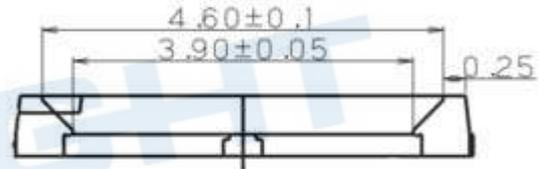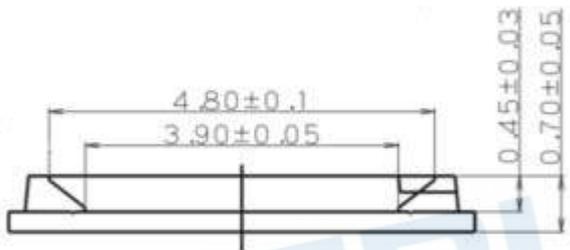

Soldering patterns


**Notes:**

- 1. Dimensions are in millimeters.
- 2. Tolerances unless mentioned are  $\pm 0.2\text{mm}$ .


## Moisture Resistant Packing Materials

1. CPN: Customer Specification (when required)
2. P/N : Everlight Production Number
3. QTY: Packing Quantity
4. CAT: Luminous Flux (Brightness) Bin
5. HUE: Color Bin
6. REF: Forward Voltage Bin
7. LOT No: Lot Number

|  |             |                  |          |
|--|-------------|------------------|----------|
| RoHS   | <b>(Pb)</b> | <b>EVERLIGHT</b> | <b>5</b> |
| CPN : XXXXXXXXXXXXXXXXXXXX                         |             |                  |          |
| XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX |             |                  |          |
| P/N : XXXXXXXXXXXX                                 |             |                  |          |
| XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXX |             |                  |          |
| LOT NO: Y150716XXX-XXXXXXXXXX-XXXXXXXXXX           |             |                  |          |
| QTY: 0123456789 HUE: XXXXXXXXXXXX                  |             |                  |          |
| CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX                |             |                  |          |
| REFERENCE: BTPYYMDDXXXXX                           |             |                  |          |




## Reel Dimensions

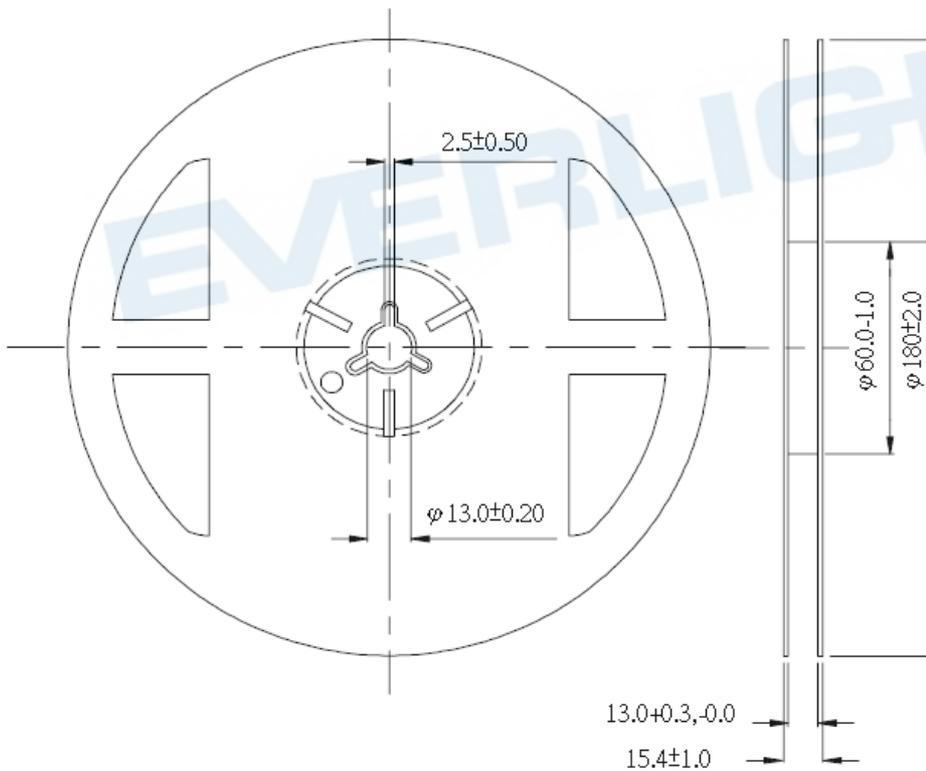

### Notes:

1. Tolerances unless mentioned are  $\pm 0.1$  mm.


## Carrier Tape Dimensions: Loaded Quantity 1500/1000/500 pcs Per Reel

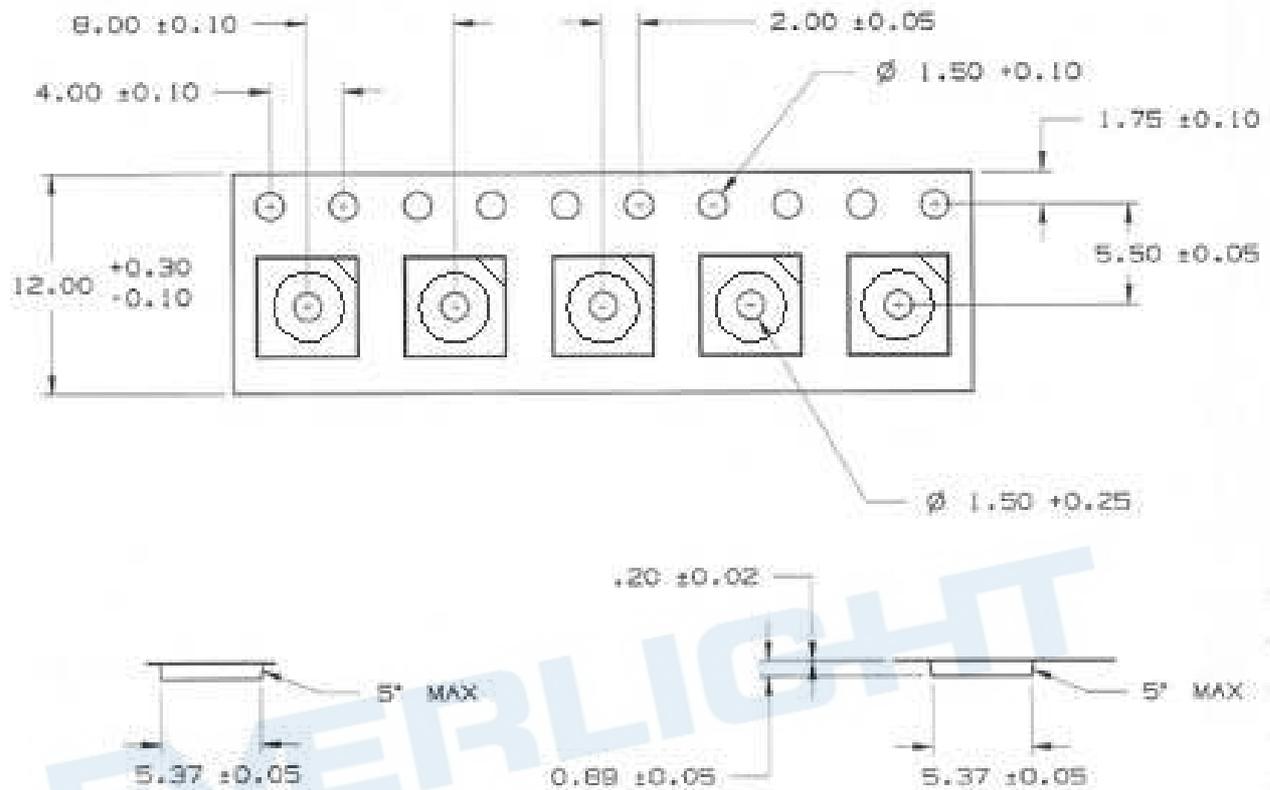

### Notes:

1. Tolerance unless mentioned is  $\pm 0.1\text{mm}$ ; Unit = mm

## Moisture Resistant Packing Process

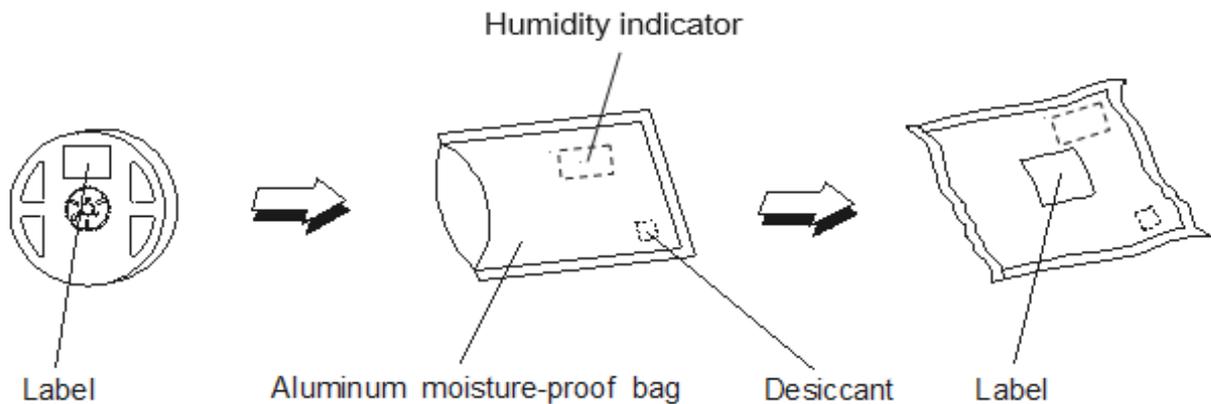

## Precautions for Use

### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 168 Hrs under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

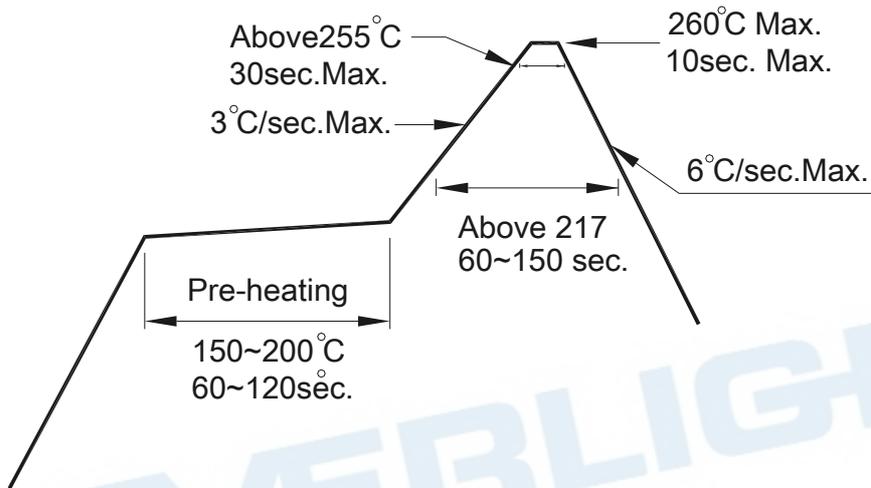

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.


3.4 After soldering, do not warp the circuit board.

### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

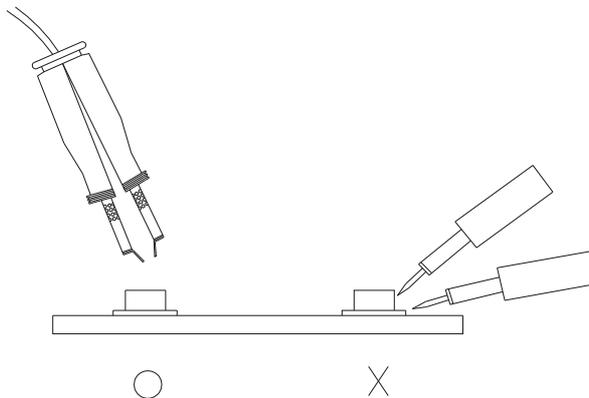

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical,

EVERLIGHT