

## EL 2820

## 2820-PA1501M-AM SERIES



### Features

- Package : SMD package
- Color : Phosphor Converted Amber
- Typ. Luminous Flux : 45 lm @ 150mA
- Viewing angle : 120°
- ESD : 8KV
- MSL : 2
- Qualifications : According to AEC-Q102 Rev A
- Sulfur Test Class : A1
- Compliance with RoHS and REACH
- Compliance Halogen Free (Br <900 ppm, Cl <900 ppm, Br + Cl < 1500 ppm)

### Applications

- Automotive lighting

# Contents

|     |                                |    |
|-----|--------------------------------|----|
| 1.  | Characteristics .....          | 2  |
| 2.  | Absolute Maximum Ratings.....  | 3  |
| 3.  | Mechanical Dimension .....     | 4  |
| 4.  | Recommended Soldering Pad..... | 5  |
| 5.  | Binning Information.....       | 6  |
| 6.  | Characteristics Graph .....    | 8  |
| 7.  | Part Number .....              | 13 |
| 8.  | Ordering Information .....     | 14 |
| 9.  | Reflow Soldering Profile ..... | 15 |
| 10. | Packaging Information.....     | 16 |
| 11. | Precaution for Use .....       | 18 |
| 12. | Sulfur Test Criteria .....     | 19 |

# 1. Characteristics

| Parameter                                  |            | Symbol             | Min. | Typ.  | Max. | Unit | Condition          |
|--------------------------------------------|------------|--------------------|------|-------|------|------|--------------------|
| Forward Current                            |            | $I_F$              | 20   | 150   | 350  | mA   | ---                |
| Luminous Flux                              |            | $I_v$              | 39   | 45    | 60   | lm   | $I_F=150\text{mA}$ |
| Forward Voltage                            |            | $V_F$              | 2.75 | 3.00  | 3.5  | V    | $I_F=150\text{mA}$ |
| Viewing Angle                              |            | $\varphi$          | ---  | 120   | ---  | deg  | $I_F=150\text{mA}$ |
| Chromaticity Coordinates                   |            | CIE-X              | ---  | 0.575 | ---  | ---  | $I_F=150\text{mA}$ |
|                                            |            | CIE-Y              | ---  | 0.418 | ---- | ---  |                    |
| Thermal Resistance<br>(Junction to Solder) | Real       | $R_{th\ JS\ real}$ | ---  | ---   | 22   | K/W  | $I_F=150\text{mA}$ |
|                                            | Electrical | $R_{th\ JS\ el}$   | ---  | ---   | 15   |      |                    |


## Notes :

- 1.Luminous Flux measurement tolerance:  $\pm 8\%$
- 2.The data of Luminous Flux measured at thermal pad= $25^{\circ}\text{C}$
- 3.Forward Voltage measurement tolerance:  $\pm 0.05\text{V}$
- 4.Tolerance of Chromaticity Coordinates X, Y :  $\pm 0.005$ .

## 2. Absolute Maximum Ratings

| Parameter                                                             | Symbol      | Ratings                            | Unit       |
|-----------------------------------------------------------------------|-------------|------------------------------------|------------|
| Power Dissipation                                                     | $P_d$       | 1225                               | mW         |
| Forward Current                                                       | $I_F$       | 350                                | mA         |
| Surge Current<br>( $t \leq 10 \mu s$ ; $D=0.005$ ; $T_s=25^\circ C$ ) | $I_{FM}$    | 750                                | mA         |
| Reverse Voltage                                                       | $V_R$       | Not designed for reverse operation | V          |
| Junction Temperature                                                  | $T_J$       | 150                                | $^\circ C$ |
| Operating Temperature                                                 | $T_{opr}$   | $-40 \sim +125$                    | $^\circ C$ |
| Storage Temperature                                                   | $T_{stg}$   | $-40 \sim +125$                    | $^\circ C$ |
| ESD Sensitivity<br>( $R=1.5k\Omega$ , $C=100pF$ )                     | $ESD_{HBM}$ | 8                                  | kV         |
| Soldering Temperature                                                 | Reflow      | $260^\circ C$ for 30sec            | $^\circ C$ |


### 3. Mechanical Dimension

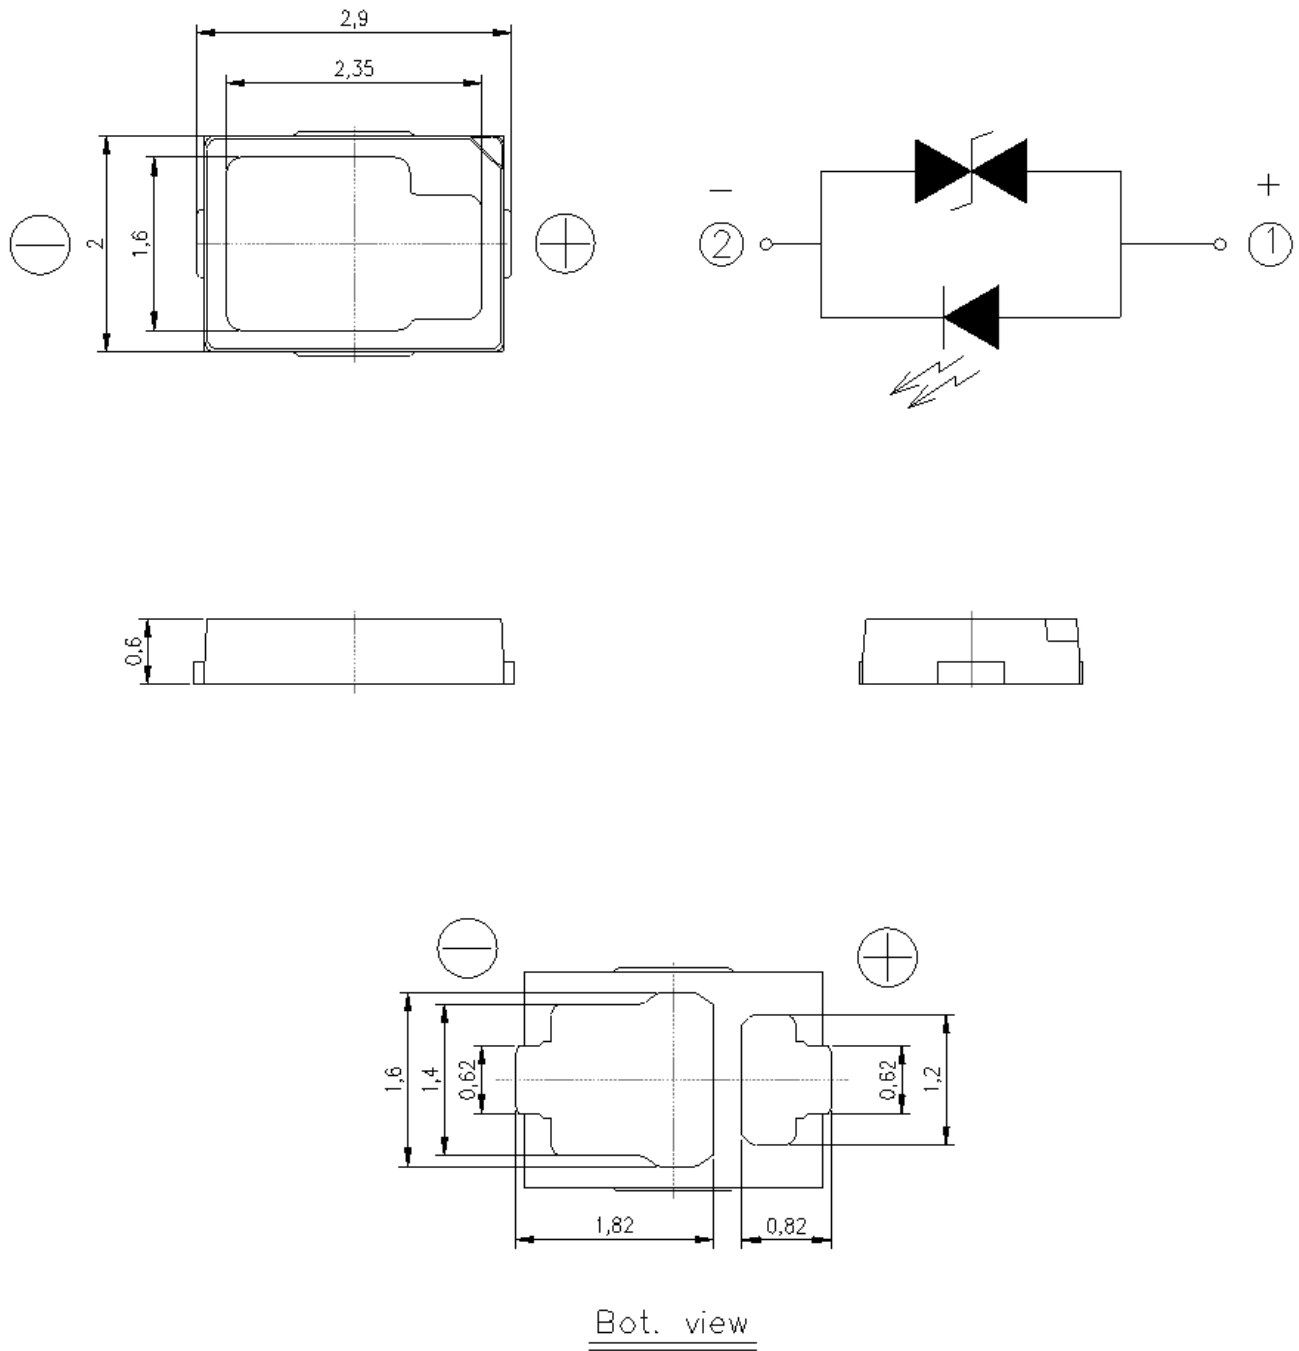

#### Notes :

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are  $\pm 0.1$  mm.

## 4. Recommended Soldering Pad

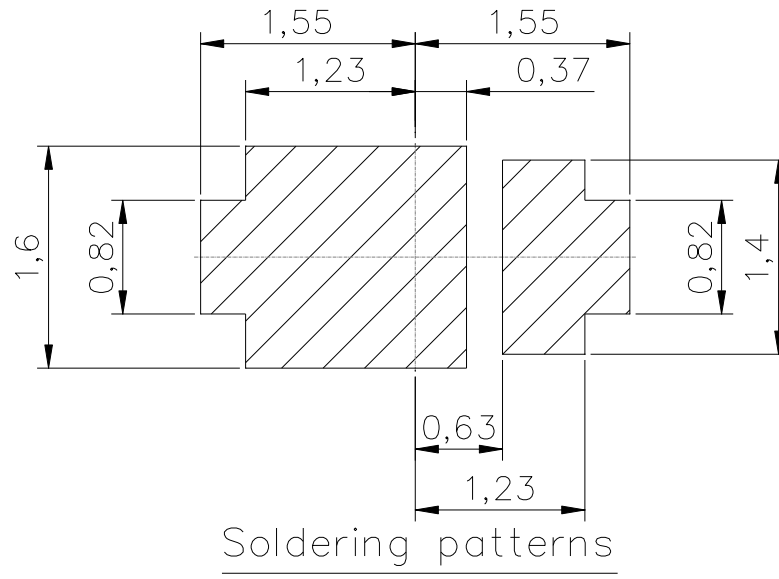

Suggested pad dimension is just reference only.  
Please modify the pad dimension based on individual need.

### Notes :

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are  $\pm 0.1\text{mm}$ .

## 5. Binning Information

### Luminous Flux Bins

| Bin code | Min. Luminous Flux (lm) | Max. Luminous Flux (lm) |
|----------|-------------------------|-------------------------|
| F3       | 39                      | 45                      |
| F4       | 45                      | 52                      |
| F5       | 52                      | 60                      |


### Forward Voltage Bins

| Bin code | Min Forward Voltage [V] | Max Forward Voltage [V] |
|----------|-------------------------|-------------------------|
| 2730     | 2.75                    | 3.00                    |
| 3032     | 3.00                    | 3.25                    |
| 3235     | 3.25                    | 3.50                    |

#### Notes :

- 1.Luminous Flux measurement tolerance:  $\pm 8\%$
2. Forward Voltage measurement tolerance:  $\pm 0.05V$
- 3.Current pulse time: 25ms

Color Bins Structure

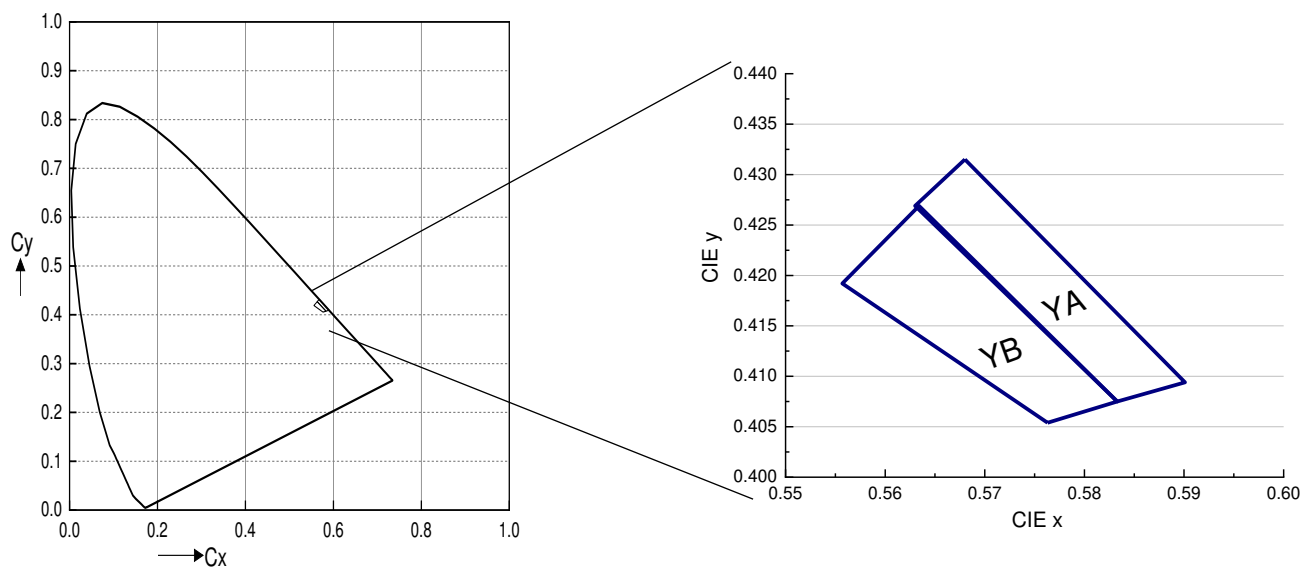

Phosphor Converted Amber Bin Coordinates

| Bin | CIE x  | CIE y  |
|-----|--------|--------|
| YA  | 0.568  | 0.4315 |
|     | 0.563  | 0.4269 |
|     | 0.5833 | 0.4075 |
|     | 0.5901 | 0.4094 |

| Bin | CIE x  | CIE y  |
|-----|--------|--------|
| YB  | 0.5763 | 0.4054 |
|     | 0.5833 | 0.4075 |
|     | 0.5634 | 0.4269 |
|     | 0.5557 | 0.4192 |

Notes :


- 1.Color coordinates measurement tolerance: ±0.05V
- 2.Current pulse time:25ms



## 6. Characteristics Graph


### Wavelength Characteristics Relative Spectral Distribution @ $T_s = 25^\circ\text{C}$ , $I_F = 150\text{mA}$

$$\Phi_V / \Phi_V(\text{Max.}) = f(\lambda)$$

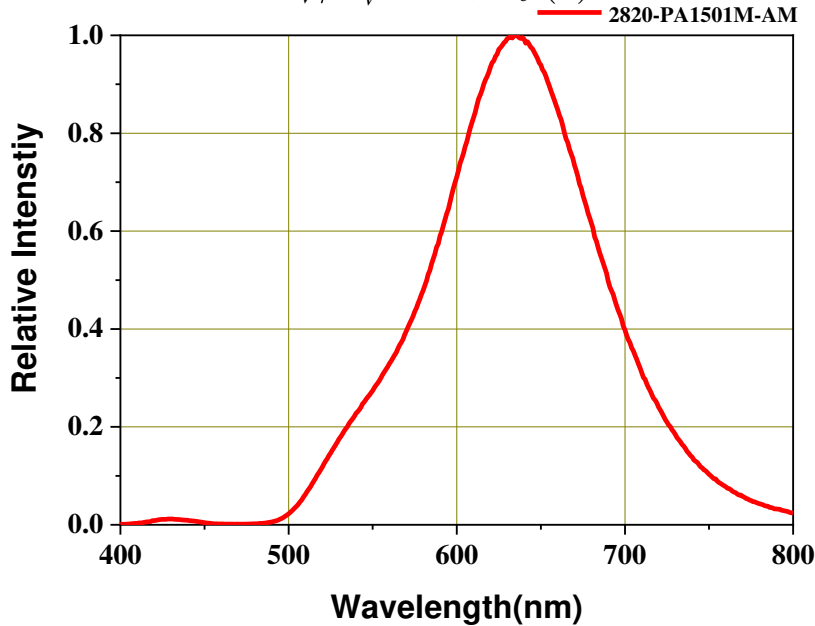

### Typical Diagram Characteristics of Radiation

$$\Phi_V / \Phi_V(0^\circ) = f(\varphi)$$

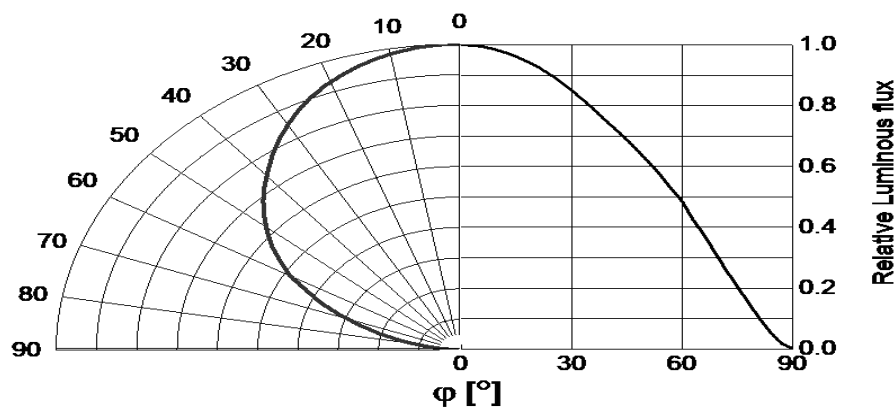


#### Notes :


1.  $\varphi$  is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value
2. View angle tolerance is  $\pm 5^\circ$

**Forward Current vs. Forward Voltage****@ Ts = 25°C**

$$I_F = f(V_F)$$

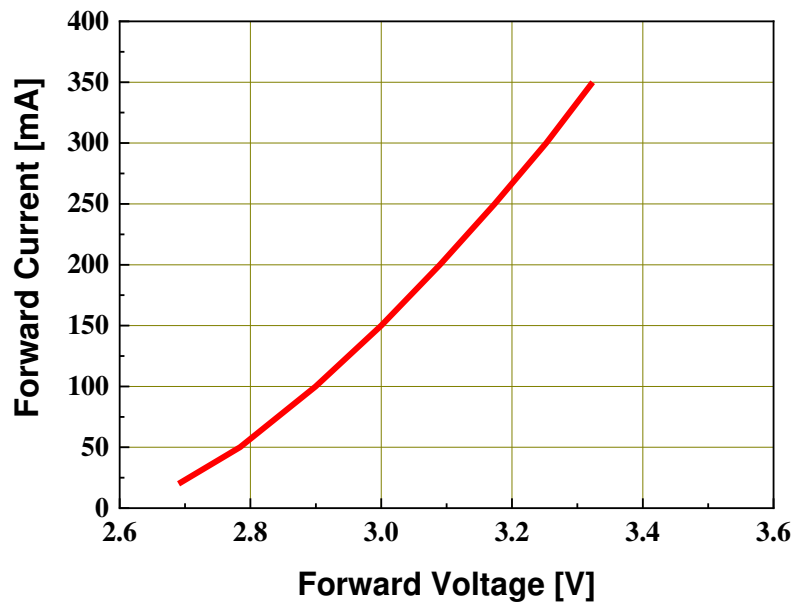**Relative Luminous Flux vs. Forward Current****@ Ts = 25°C**


$$\Phi_V / \Phi_V(150mA) = f(I_F)$$

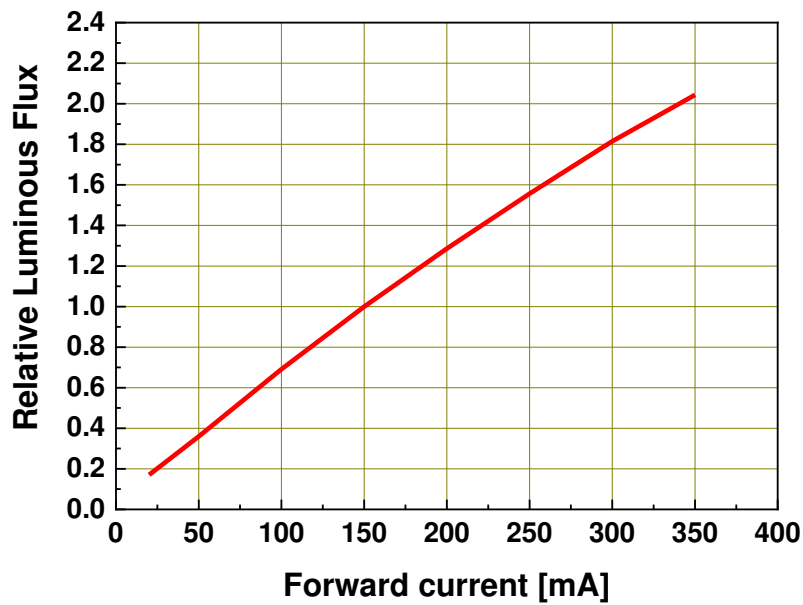

## Chromaticity Coordinates Shift vs. Forward Current

@  $T_s = 25^\circ\text{C}$


$$\Delta CIE\ x, \Delta CIE\ y = f(I_F)$$

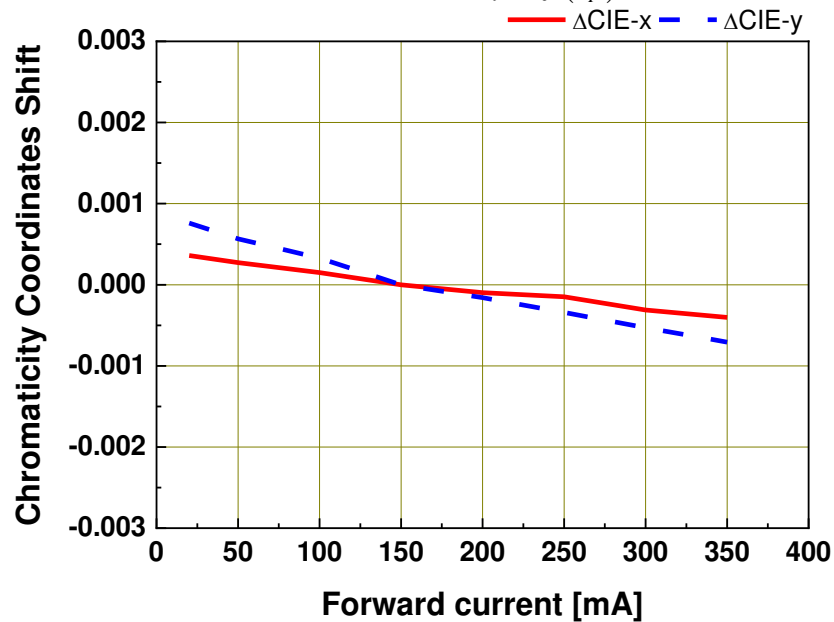

## Relative Forward Voltage vs. Junction Temperature

@  $I_F = 150\text{mA}$


$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j)$$

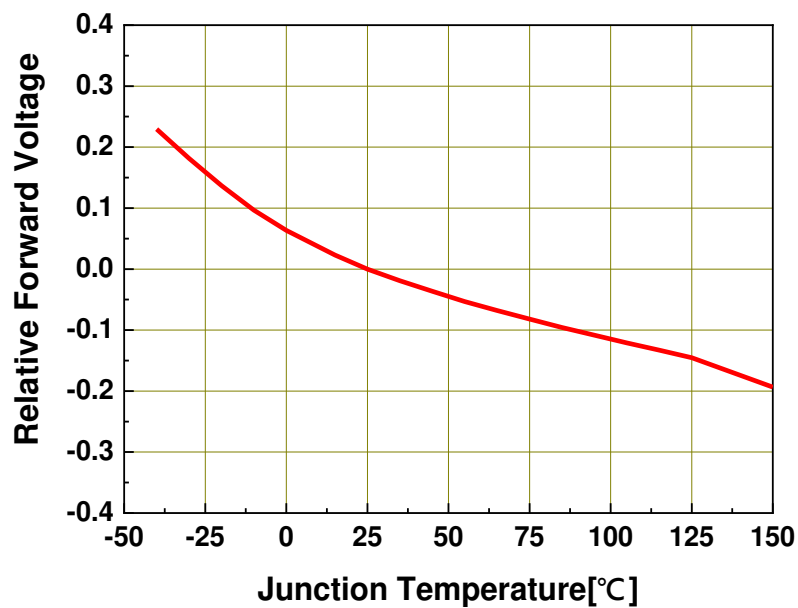

## Relative Luminous Flux vs. Junction Temperature

@  $I_F=150\text{mA}$


$$\Phi_V / \Phi_V(25^\circ\text{C}) = f(T_j)$$

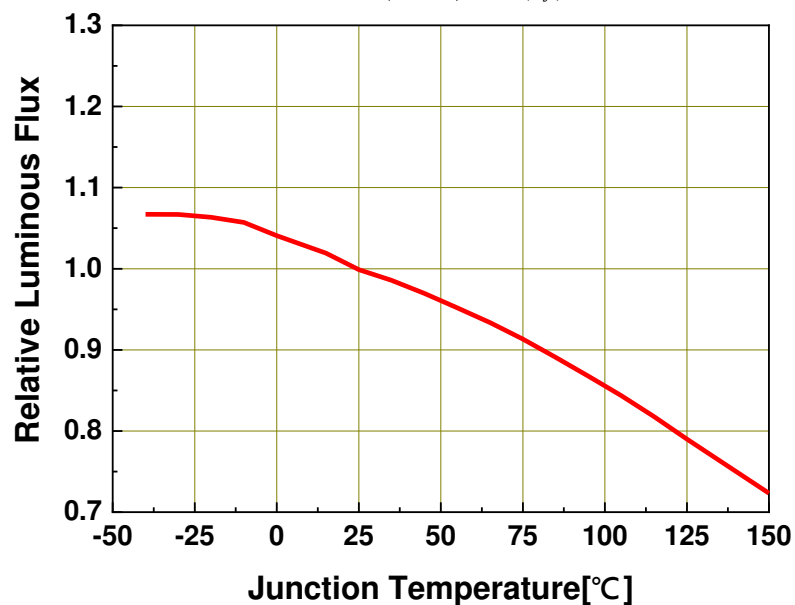

## Chromaticity Coordinates Shift vs. Junction Temperature

@  $I_F=150\text{mA}$

$$\Delta CIE\ x, \Delta CIE\ y = f(T_j)$$

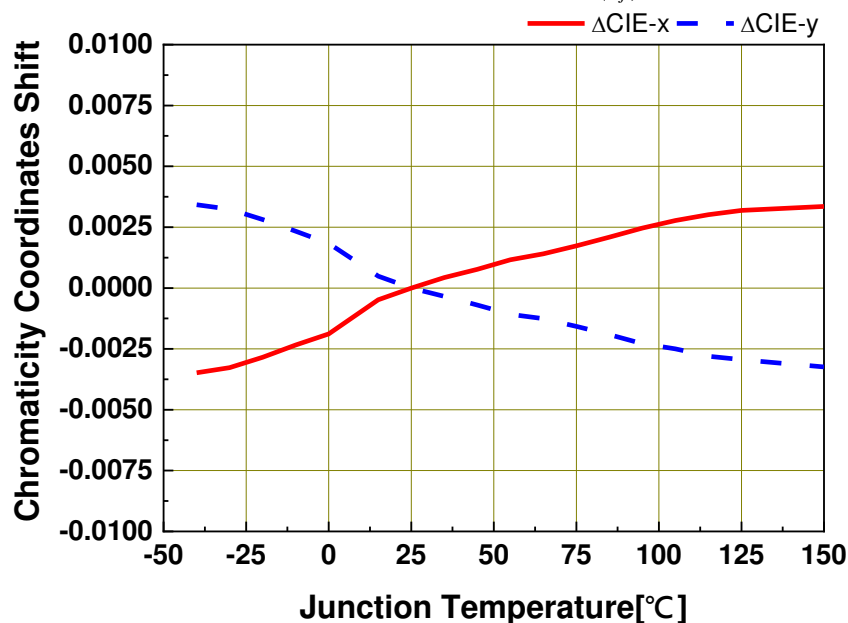



## 7. Part Number

### 2820-PA1501M-AM

Part number is designated with below details

- 2820 = Product family name
- PA= Color
- 150 = Test current [mA].
- 1 = Lead Frame Type ( 0=Ag ; 1=Au ).
- M = Brightness Level (H=High; M=Medium; L=Low).
- AM = Automotive application.

Notes :

#### Color

| Symbol | Description                     |
|--------|---------------------------------|
| C      | Cool White                      |
| N      | Neutral White                   |
| WW     | Warm White                      |
| PA     | Phosphor Converted Amber        |
| PR     | Phosphor Converted Red          |
| UB     | Blue                            |
| IB     | Ice Blue                        |
| SB     | Sky Blue                        |
| UP     | Purple                          |
| UG     | Green                           |
| UY     | Yellow                          |
| UYG    | Brilliant Yellow Green          |
| UPG    | Pale Green                      |
| UA     | Amber                           |
| UR     | Red                             |
| SR     | Super Red                       |
| RGB    | RGB-Color                       |
| PYG    | Phosphor Converted Yellow Green |

## 8. Ordering Information


| Part Number     | Order Code                               |
|-----------------|------------------------------------------|
| 2820-PA1501M-AM | 2820-PA1501M- <b>ABCDEFGHIJKL</b> -MN-AM |

Order code contains information with below details :

- 1.ABCD = min/max wavelength or CCT.
- 2.EFGH = min./max. luminous flux in [lm] or luminous intensity in [mcd].
- 3.IJKL= min./max. forward voltage.
- 4.MN = Packing code.
- 5.AM = Automotive Application.

## 9. Reflow Soldering Profile

### Soldering Condition (Reference: IPC/JEDEC J-STD-020D)

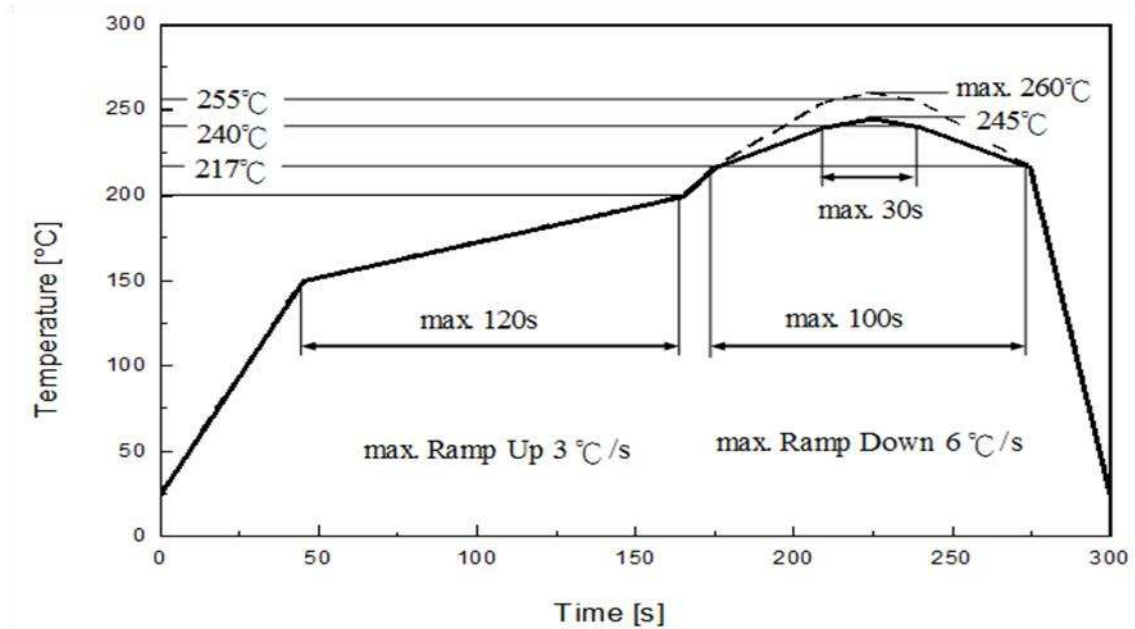

| Profile Feature                                   | Pb-Free Assembly | Unit    |
|---------------------------------------------------|------------------|---------|
|                                                   | Recommendation   |         |
| Ramp-up rate to preheat 25 °C to 150 °C           | 3                | °C /sec |
| Time of soaking zone 150 °C to 200 °C             | 120              | sec     |
| Ramp-up rate to peak                              | 3                | °C /sec |
| Liquid's temperature                              | 217              | °C      |
| Time above liquid's temperature                   | 100              | sec     |
| Peak temperature (max.)                           | 260              | °C      |
| Time within 5°C of the specified peak temperature | 30               | sec     |
| Ramp-down Rate (max.)                             | 6                | °C /sec |




## 10. Packaging Information

### ● Product Labeling



- CPN : Customer's Product Number
- P/N : Everlight Part Number
- QTY : Packing Quantity
- CAT : Luminous Flux (Brightness) Bin
- HUE : Color Bin
- REF : Forward Voltage Bin
- LOT No : Lot Number


### ● Packing: Loaded Quantity 2000 pcs Per Reel

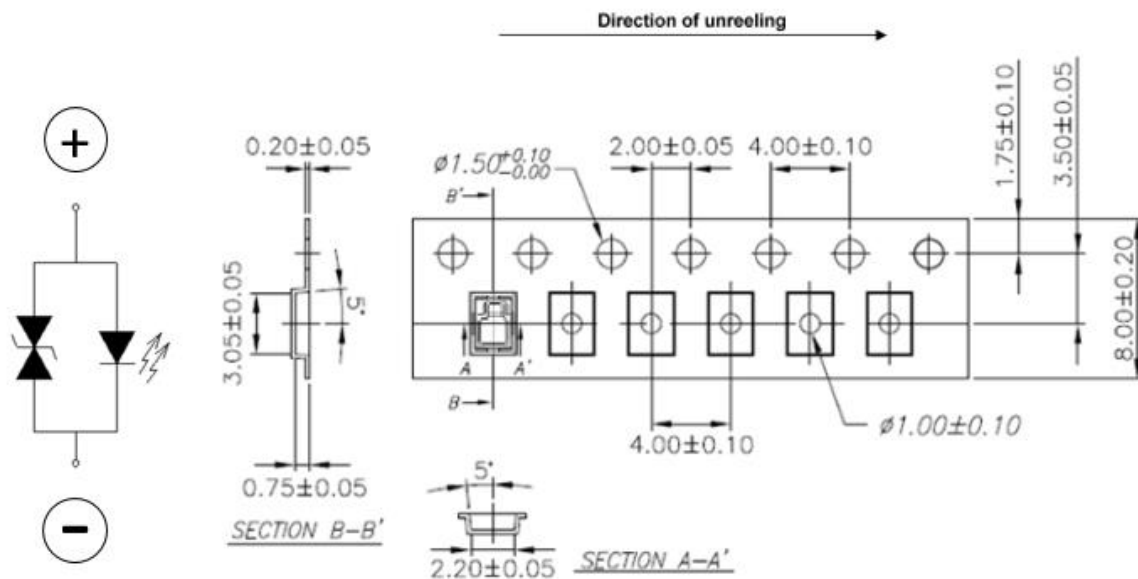

#### Notes :

1. Dimensions are in millimeters.


## ● Reel Dimensions

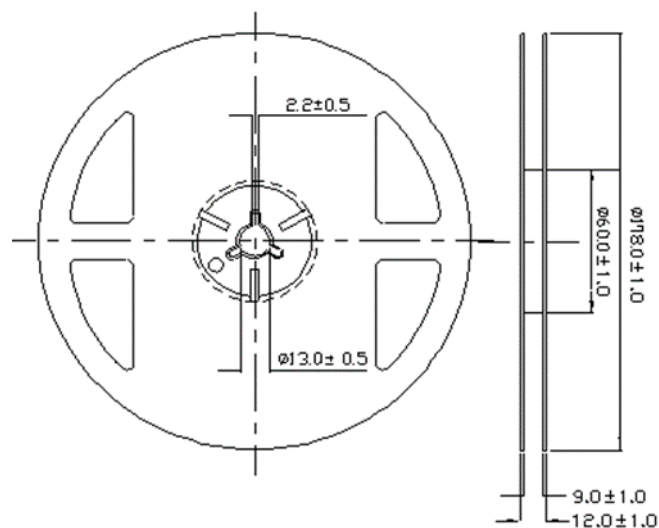

### Notes :

1. Dimensions are in millimeters.

## ● Moisture Resistant Packing Process

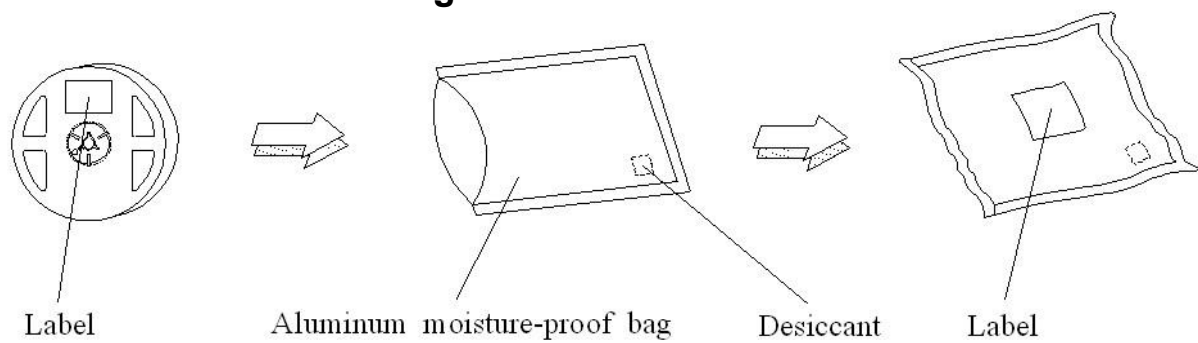

## 11. Precaution for Use

### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (burn out will happen) ◦

### 2. Assemblies

Do not stack assemblies containing LEDs to prevent damage to the optical surface of LEDs. Forces applied to the optical surface may result in the surface being damaged ◦

### 3. Soldering Condition

3.1 When soldering, do not put stress on the LEDs during heating ◦

3.2 After soldering, do not warp the circuit board ◦

### 4. Soldering Iron


Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder ◦

### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

### 6. Reverse Operation

This product is intended to be operated applying a forward current within the specified range. Applying any continuous reverse bias or forward bias below the voltage range of light emission shall be avoided because it may cause migration which can change the electro-optical characteristics or damage the LED.

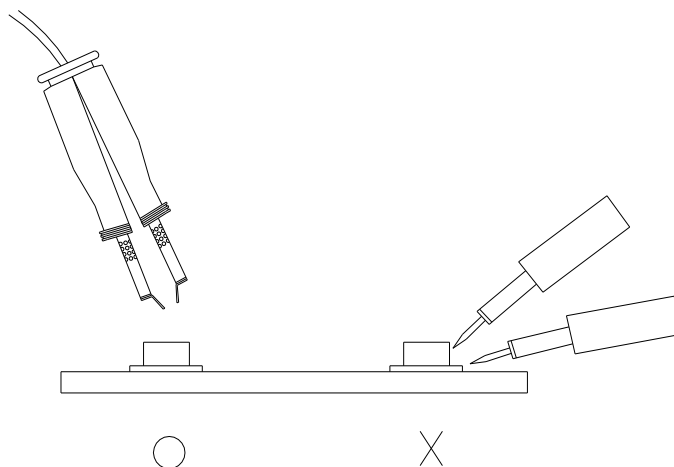

## 12. Sulfur Test Criteria

| Products                   | Failure Criteria                                                                                                                                                                                           |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exterior Lighting products | Luminous Flux +/-20%, forward voltage +/-10%, color coordinates x, y +/-0.01,<br>color wavelength +/- 2 nm<br>Visual defect issue following Everlight's inspection criteria                                |
| Interior lighting products | Luminous Flux +/-30% or +/-50% for some application, forward voltage +/-10%,<br>color coordinates x, y +/-0.02, color wavelength +/- 2 nm<br>Visual defect issue following Everlight's inspection criteria |

| H2S test | Grade A0                                          | Grade A1                                                                                            | Grade B0                                          | Grade B1                                                                                            |
|----------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Class A  | Pass ΔIV, ΔColor,<br>ΔVF criteria<br>No Corrosion | Pass ΔIV, ΔColor,<br>ΔVF criteria<br>Corrosion without the<br>impact on reliability<br>and lifetime |                                                   |                                                                                                     |
| Class B  |                                                   |                                                                                                     | Pass ΔIV, ΔColor,<br>ΔVF criteria<br>No Corrosion | Pass ΔIV, ΔColor,<br>ΔVF criteria<br>Corrosion without the<br>impact on reliability<br>and lifetime |

| Condition<br>for H2S and FMG | Description                                       |                                                                                                                                                       |
|------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | H2S                                               | FMG                                                                                                                                                   |
| Class A                      | 15 ppm with duration 336 h at 40 °C and<br>90% RH | Duration 500 h at 25 °C and 75% RH.<br>H2S concentration: 10ppb<br>SO2 concentration: 200ppb<br>NO2 concentration: 200ppb<br>Cl2 concentration: 10ppb |
| Class B                      | 10 ppm with duration 500 h at 25 °C and<br>75% RH |                                                                                                                                                       |

| Grade for H2S Test | Description                                              |
|--------------------|----------------------------------------------------------|
| 0                  | No Corrosion                                             |
| 1                  | Corrosion without the impact on reliability and lifetime |